


**Universität
Stuttgart**

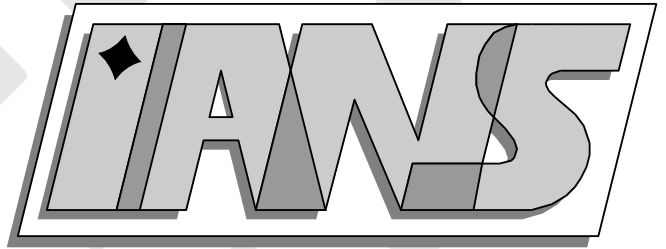

A posteriori error estimator and error control for
contact problems

Alexander Weiss, Barbara I. Wohlmuth

**Berichte aus dem Institut für
Angewandte Analysis und Numerische Simulation**

Universität Stuttgart

A posteriori error estimator and error control for
contact problems

Alexander Weiss, Barbara I. Wohlmuth

**Berichte aus dem Institut für
Angewandte Analysis und Numerische Simulation**

Preprint 2007/012

Institut für Angewandte Analysis und Numerische Simulation (IANS)
Fakultät Mathematik und Physik
Fachbereich Mathematik
Pfaffenwaldring 57
D-70 569 Stuttgart

E-Mail: ians-preprints@mathematik.uni-stuttgart.de

WWW: <http://preprints.ians.uni-stuttgart.de>

ISSN **1611-4176**

© Alle Rechte vorbehalten. Nachdruck nur mit Genehmigung des Autors.
IANS-Logo: Andreas Klimke. \LaTeX -Style: Winfried Geis, Thomas Merkle.

A POSTERIORI ERROR ESTIMATOR AND ERROR CONTROL FOR CONTACT PROBLEMS

ALEXANDER WEISS* AND BARBARA I. WOHLMUTH*

Abstract. In this paper, we consider two error estimators for one-body contact problems. The first error estimator is defined in terms of $H(\text{div})$ conforming stress approximations and equilibrated fluxes while the second is a standard edge-based residual error estimator without any modification with respect to the contact. We show reliability and efficiency for both estimators. Moreover, the error is bounded by the first estimator with a constant one plus a higher order data oscillation term plus a term arising from the contact that is shown numerically to be of higher order. The second estimator is used in a control-based AFEM refinement strategy and the decay of the error in the energy is shown. Several numerical tests demonstrate the performance of both estimators.

Key words. equilibrated fluxes, Lagrange multipliers, a posteriori error estimates, contact problems.

AMS subject classifications. 65N30, 65N15, 65N50

1. Introduction. Finite element methods are commonly used in the numerical simulation of many engineering applications. Adaptive techniques based on a posteriori error estimators have become an indispensable tool and are well-established for such methods, see [2, 27, 55] and the references therein. Error estimators have also been successfully used in the field of nonconforming discretizations [1, 19, 20, 24] and for variational inequalities [3, 13, 26] like obstacle problems, see [14, 32, 34, 53] and contact problems, see [11, 12, 18, 22, 31, 41, 61].

Recently, error control strategies, commonly known as AFEM refinement strategies, have been developed, e.g., in [5, 21, 25, 42, 45, 46]. Here, special refinement rules in combination with a control over the data oscillation terms lead to a guaranteed error decay. Moreover, optimal convergence under mild regularity assumptions has been stated in [10, 51, 52]. These control based strategies have also been applied to obstacle problems [15]. Here, a decay in the energy can be achieved instead of the error decay.

Usually upper and lower bounds are proved in order to guarantee the reliability and the efficiency of the proposed estimator. Most of the existing approaches involve constants depending on the shape regularity of the elements and/or of the jumps in the coefficients; but these dependences are often not given explicitly. However, in a recent paper [44] an error estimator for the Lamé equation based on $H(\text{div})$ -conforming approximations for the stress and on equilibrated fluxes has been introduced which guarantees an upper bound with constant one up to data oscillation terms.

In this paper, we adapt this error estimator to one-body contact problems. Then, the error is bounded by the same error estimator with a constant one plus an extra term arising from the contact which proves numerically to be of higher order. Moreover it is shown that the extra term can be neglected without losing the reliability of the error estimator. Using a similar technique, also a new upper bound for the error in the Lagrange multiplier is established.

We also define a control-based refinement strategy. Here a standard edge-based residual error estimator is used in combination with the well-known AFEM marking and refinement technique [42]. Even though the contact stress is not used in the definition of this error estimator, reliability and efficiency for one-body contact problems are established. Moreover, we show a strict energy decay when using the AFEM technique.

The rest of the paper is organized as follows: In Section 2, we recall the contact problem and its discretization. Section 3 is devoted to the introduction of the estimator and the proofs of the upper and lower bounds. In Section 4, we present some numerical examples that demonstrate the usage of our error estimator for contact problems. A new upper bound for the Lagrange multiplier is derived in Section 5. The last two sections are dedicated to an AFEM energy control strategy. In Section 6, the strategy based on an edge-based error estimator is presented and energy decay is

*Institute of Applied Analysis and Numerical Simulations (IANS), Universität Stuttgart, Pfaffenwaldring 57, 70529 Stuttgart, Germany. email: {weiss,wohlmuth}@ians.uni-stuttgart.de
This work was supported in part by the Deutsche Forschungsgemeinschaft, SFB 404, B8.

shown. Numerical examples for this strategy and comparisons between the two error estimators are given in Section 7.

2. Contact problem and discretization. In this section, we state the setting of a contact problem between an elastic body and a rigid obstacle without friction and its discretization. The body in its reference configuration is given by $\Omega \subset \mathbb{R}^2$. We assume the boundary $\partial\Omega$ to be divided into three open disjoint measurable parts $\Gamma_D, \Gamma_N, \Gamma_C$ with $\text{meas}(\Gamma_D) > 0$. Furthermore, we assume that $\bar{\Gamma}_C$ is a compact subset of $\partial\Omega \setminus \bar{\Gamma}_D$. We denote the outer unit normal vector on the boundary $\partial\Omega$ by \mathbf{n} . On the contact zone the normal vector \mathbf{n} is assumed to be constant. We impose Dirichlet conditions on Γ_D and homogeneous Neumann data on Γ_N . Moreover, we denote volume forces by $\mathbf{f} \in [L^2(\Omega)]^2$. We consider a homogeneous isotropic linearized Saint Venant–Kirchhoff material, where the stress tensor is given in terms of Hooke’s tensor \mathcal{C} by

$$\boldsymbol{\sigma}(\mathbf{v}) := \lambda \text{tr}(\boldsymbol{\varepsilon}(\mathbf{v}))\mathbf{Id} + 2\mu\boldsymbol{\varepsilon}(\mathbf{v}) =: \mathcal{C}\boldsymbol{\varepsilon}(\mathbf{v}),$$

and the linearized strain tensor is defined by $\boldsymbol{\varepsilon}(\mathbf{v}) := 1/2(\nabla\mathbf{v} + (\nabla\mathbf{v})^\top)$. The positive material parameters λ and μ are the Lamé parameters and are assumed to be constant. Moreover, tr denotes the matrix trace operator and \mathbf{Id} the identity matrix in \mathbb{R}^2 . The elastic equilibrium condition can be written as

$$\begin{aligned} -\text{div } \boldsymbol{\sigma}(\mathbf{u}) &= \mathbf{f} && \text{in } \Omega, \\ \mathbf{u} &= \mathbf{u}_D && \text{on } \Gamma_D, \\ \boldsymbol{\sigma}(\mathbf{u})\mathbf{n} &= \mathbf{0} && \text{on } \Gamma_N. \end{aligned} \tag{2.1}$$

In addition to (2.1), we have to satisfy the linearized non-penetration condition. Taking into account that we do not consider friction, we find on Γ_C the following equality and inequality constraints

$$\mathbf{u}_n \leq 0, \quad \sigma_n \leq 0, \quad \sigma_n \mathbf{u}_n = 0, \tag{2.2}$$

$$\boldsymbol{\sigma}_t = 0, \tag{2.3}$$

where $\sigma_n := \mathbf{n} \cdot \boldsymbol{\sigma}(\mathbf{u})\mathbf{n}$ and $\boldsymbol{\sigma}_t = \boldsymbol{\sigma}(\mathbf{u})\mathbf{n} - \sigma_n \mathbf{n}$ is the normal and tangential component, respectively, of the boundary stress, and $\mathbf{u}_n := \mathbf{u} \cdot \mathbf{n}$ stands for the displacements in normal direction. Here, we have been assuming for simplicity that the body in its reference configuration is in contact with the rigid obstacle on Γ_C and that there is no gap.

2.1. Weak formulation. It is well known that the solution of (2.1)–(2.3) can be rewritten as solution of a constrained minimization problem or equivalently as variational inequality on a convex set, see, e.g., [37]. To give the variational formulation of problem (2.1) with the non-penetration condition (2.2) and the condition of no friction (2.3), we introduce the space $\mathbf{V} := [H^1(\Omega)]^2$, equipped with the H^1 -norm $\|\mathbf{v}\|_1$. Moreover, we set $\mathbf{V}_0 := \{\mathbf{v} \in \mathbf{V} : \mathbf{v}|_{\Gamma_D} = \mathbf{0}\}$ and $\mathbf{V}_D := \{\mathbf{v} \in \mathbf{V} : \mathbf{v}|_{\Gamma_D} = \mathbf{u}_D\}$. For $\mathbf{u}, \mathbf{v} \in \mathbf{V}$, we define the bilinear form $a(\mathbf{u}, \mathbf{v})$ and the linear form $f(\mathbf{v})$ by

$$a(\mathbf{u}, \mathbf{v}) := \int_{\Omega} \boldsymbol{\sigma}(\mathbf{u}) : \boldsymbol{\varepsilon}(\mathbf{v}) \, dx, \quad f(\mathbf{v}) := \int_{\Omega} \mathbf{f} \cdot \mathbf{v} \, dx.$$

Let the convex set \mathbf{K} be given by $\mathbf{K} := \{\mathbf{v} \in \mathbf{V}_D : \mathbf{v}_n \leq 0 \text{ on } \Gamma_C\}$, then the solution $\mathbf{u} \in \mathbf{K}$ of the contact problem satisfies the variational inequality

$$a(\mathbf{u}, \mathbf{v} - \mathbf{u}) \geq f(\mathbf{v} - \mathbf{u}), \quad \mathbf{v} \in \mathbf{K}. \tag{2.4}$$

Although our discretization is based on a pure displacement approach, the analysis and the definition of the error estimator use a mixed formulation. Introducing the surface traction on the contact boundary Γ_C as additional unknown, the variational inequality (2.4) can be rewritten as a saddle point problem. The Lagrange multiplier space \mathbf{M} is set to be the dual space of the trace

space \mathbf{W} of \mathbf{V}_0 restricted to Γ_C . By assumption, $\bar{\Gamma}_C$ is a compact subset of $\partial\Omega \setminus \bar{\Gamma}_D$, and thus we have $\mathbf{W} = [H^{\frac{1}{2}}(\Gamma_C)]^2$. We now define the convex cone of Lagrange multipliers by

$$\mathbf{M}^+ := \{ \boldsymbol{\mu} \in \mathbf{M} : \langle \boldsymbol{\mu}, \mathbf{v} \rangle \geq 0, \mathbf{v} \in \mathbf{W}^+ \},$$

where $\langle \cdot, \cdot \rangle$ denotes the duality pairing between \mathbf{M} and \mathbf{W} on Γ_C , and $\mathbf{W}^+ := \{ \mathbf{v} \in \mathbf{W} : \mathbf{v}_n \geq 0 \}$. It is easy to see that for $\boldsymbol{\mu} \in \mathbf{M}^+$, we have $\boldsymbol{\mu} \cdot \mathbf{t} = 0$.

Defining the bilinear form $b(\cdot, \cdot)$ on the product space $\mathbf{V} \times \mathbf{M}$ by

$$b(\mathbf{v}, \boldsymbol{\mu}) := \langle \boldsymbol{\mu}, \mathbf{v} \rangle, \quad \boldsymbol{\mu} \in \mathbf{M}, \mathbf{v} \in \mathbf{V},$$

we get the saddle point formulation of a contact problem without friction, see, e.g., [28, Chap. 1.3]: find $\mathbf{u} \in \mathbf{V}_D$ and $\boldsymbol{\lambda} \in \mathbf{M}^+$ such that

$$\begin{aligned} a(\mathbf{u}, \mathbf{v}) + b(\mathbf{v}, \boldsymbol{\lambda}) &= f(\mathbf{v}), & \mathbf{v} \in \mathbf{V}_0, \\ b(\mathbf{u}, \boldsymbol{\mu} - \boldsymbol{\lambda}) &\leq 0, & \boldsymbol{\mu} \in \mathbf{M}^+. \end{aligned} \quad (2.5)$$

The existence and uniqueness of $(\mathbf{u}, \boldsymbol{\lambda}) \in \mathbf{V}_D \times \mathbf{M}^+$ has been stated, e.g., in [28, Theorem 3.11 and Remark 3.10]. Moreover, we find that $\boldsymbol{\lambda} = -\boldsymbol{\sigma}(\mathbf{u})\mathbf{n}$. Setting $\boldsymbol{\mu} = \mathbf{0}$ and $\boldsymbol{\mu} = 2\boldsymbol{\lambda}$, it is easy to see that $b(\mathbf{u}, \boldsymbol{\lambda}) = 0$. The second line of (2.5) reflects the linearized non-penetration condition and guarantees that $\mathbf{u} \in \mathbf{K}$. Restricting the first line of (2.5) to $\mathbf{v} - \mathbf{u}$ for $\mathbf{v} \in \mathbf{K}$, we find $\mathbf{v} - \mathbf{u} \in \mathbf{V}_0$ and

$$a(\mathbf{u}, \mathbf{v} - \mathbf{u}) = f(\mathbf{v} - \mathbf{u}) - b(\mathbf{v}, \boldsymbol{\lambda}) \geq f(\mathbf{v} - \mathbf{u}),$$

and thus \mathbf{u} solves (2.4).

REMARK 2.1. *We note that in case of no friction it would be sufficient to work with a scalar Lagrange multiplier space. Working with the vectorial space \mathbf{M} has the advantage that the approach can be easily generalized to friction.*

2.2. Discretization. In this section, we consider a discrete formulation of the variational inequality (2.4) and the saddle point formulation (2.5). A one-body contact problem can be regarded as a simplified case of a two-body contact problem for which mortar techniques with nodal Lagrange finite elements as Lagrange multipliers have been considered and analyzed, e.g., in [7, 8, 9, 23, 29, 30]. Here, we apply these results and work with a dual Lagrange multiplier space, see, e.g., [33]. To approximate \mathbf{V} , we use standard conforming finite elements of lowest order. For simplicity of notation, we restrict ourselves to the case of a locally quasi-uniform simplicial triangulation, and we assume that the domain Ω and the sub-boundaries Γ_C , Γ_N and Γ_D are resolved by the triangulation. The finite element space associated with the shape regular triangulation \mathcal{T}_h is denoted by $S_h(\Omega)$. For ease of presentation, we assume \mathbf{u}_D is a piecewise affine function and can be exactly represented by an element in $[S_h(\Omega)]^2$. We define the discrete space $\mathbf{V}_h := [S_h(\Omega)]^2 \cap \mathbf{V}_0$ and set $\mathbf{V}_{h;D} := [S_h(\Omega)]^2 \cap \mathbf{V}_D$. In the mortar context, the Lagrange multiplier space inherits its one-dimensional mesh from the two-dimensional triangulation on the slave side. Here we only have one body which plays the role of the slave side. The discrete Lagrange multiplier space is defined in terms of continuous piecewise cubic nodal basis functions ψ_p , $p \in \mathcal{P}_h^C$, where \mathcal{P}_h^C denotes the set of nodes on $\bar{\Gamma}_C$, [59], see Figure 2.1.

We recall that the two sets $\{\psi_p\}_p$ and $\{\varphi_p\}_p$ form a pair of biorthogonal basis functions, where φ_p is the nodal Lagrange finite element basis function associated with the node p on the one-dimensional boundary $\bar{\Gamma}_C$, i.e., $\int_{\Gamma_C} \psi_p \varphi_q \, ds = \delta_{pq} \int_{\Gamma_C} \varphi_q \, ds$. The discrete vectorial Lagrange multiplier space is denoted by \mathbf{M}_h . Let \mathbf{W}_h be the vector valued trace space of \mathbf{V}_h restricted to Γ_C . We now define the discrete approximation of \mathbf{M}^+ by

$$\mathbf{M}_h^+ := \{ \boldsymbol{\mu}_h \in \mathbf{M}_h : \langle \boldsymbol{\mu}_h, \mathbf{v}_h \rangle \geq 0, \mathbf{v}_h \in \mathbf{W}_h^+ \},$$

where $\mathbf{W}_h^+ := \{ \mathbf{v}_h \in \mathbf{W}_h : (\mathbf{v}_h)_n \geq 0 \text{ on } \Gamma_C \}$. Using the biorthogonality between $\{\varphi_p\}_p$ and $\{\psi_p\}_p$, it is easy to see that each element $\boldsymbol{\mu}_h \in \mathbf{M}_h^+$ can be written as $\boldsymbol{\mu}_h = \sum_{p \in \mathcal{P}_h^C} \alpha_p \psi_p \mathbf{n}$, $\alpha_p \geq 0$.

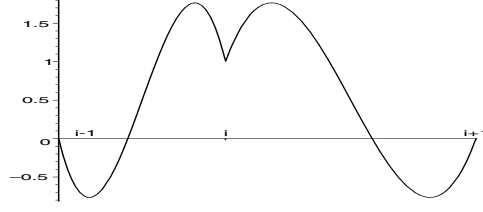


FIGURE 2.1. Nodal basis function of a continuous dual Lagrange multiplier space

We remark that $\psi_p \mathbf{n} \notin \mathbf{M}^+$ and thus $\mathbf{M}_h^+ \not\subset \mathbf{M}^+$. With respect to the Lagrange multiplier this approach is a nonconforming finite element technique.

The finite element solution of (2.4) is given by: find $\mathbf{u}_h \in \mathbf{K}_h$

$$a(\mathbf{u}_h, \mathbf{v} - \mathbf{u}_h) \geq f(\mathbf{v} - \mathbf{u}_h), \quad \mathbf{v} \in \mathbf{K}_h, \quad (2.6)$$

where $\mathbf{K}_h := \{\mathbf{v} \in \mathbf{V}_{h;D} : (\mathbf{v}_h)_n \leq 0 \text{ on } \Gamma_C\} \subset \mathbf{K}$. In contrast to the Lagrange multiplier, the primal variable \mathbf{u}_h can be analyzed within the abstract framework of conforming finite elements. Moreover it is easy to see that the discrete set \mathbf{K}_h can be characterized by

$$\mathbf{K}_h = \{\mathbf{v} \in \mathbf{V}_{h;D} : \int_{\Gamma_C} (\mathbf{v}_h)_n \psi_p \, ds \leq 0, p \in \mathcal{P}_h^C\}.$$

Now, (2.6) can be reformulated as a mixed approach: find $\mathbf{u}_h \in \mathbf{V}_{h;D}$ and $\boldsymbol{\lambda}_h \in \mathbf{M}_h^+$ such that

$$\begin{aligned} a(\mathbf{u}_h, \mathbf{v}_h) + b(\mathbf{v}_h, \boldsymbol{\lambda}_h) &= f(\mathbf{v}_h), & \mathbf{v}_h &\in \mathbf{V}_h, \\ b(\mathbf{u}_h, \boldsymbol{\mu}_h - \boldsymbol{\lambda}_h) &\leq 0, & \boldsymbol{\mu}_h &\in \mathbf{M}_h^+. \end{aligned} \quad (2.7)$$

Setting $\boldsymbol{\mu}_h = \mathbf{0}$ and $\boldsymbol{\mu}_h = 2\boldsymbol{\lambda}_h$, we obtain the discrete complementary condition $b(\mathbf{u}_h, \boldsymbol{\lambda}_h) = 0$. We note that if the finite element solution of (2.6) is known, the discrete Lagrange multiplier $\boldsymbol{\lambda}_h$ can be locally computed from (2.7) by static condensation. This results from the fact that we work with biorthogonal basis functions, and thus the inverse of a diagonal matrix enters. More precisely, we have $\boldsymbol{\lambda}_h = \sum_{p \in \mathcal{P}_h^C} \beta_p \psi_p \mathbf{n}$, where β_p is the local scaled residual given by

$$\beta_p = \frac{f(\varphi_p \mathbf{n}) - a(\mathbf{u}_h, \varphi_p \mathbf{n})}{\int_{\Gamma_C} \varphi_p \, ds} \geq 0.$$

In the case that \mathbf{M} is discretized in terms of nodal Lagrange finite elements, one has to solve a mass matrix system, and the coefficients of the solution vector do not have to be non-negative.

To show a local upper bound for the error estimator in the contact setting, we use the mortar projection operators $\boldsymbol{\Pi} : [H^{\frac{1}{2}}(\Gamma_C)]^2 \rightarrow \mathbf{W}_h$ and $\boldsymbol{\Pi}^* : [H^{-\frac{1}{2}}(\Gamma_C)]^2 \rightarrow \mathbf{M}_h$

$$\langle \boldsymbol{\mu}, \boldsymbol{\Pi} \mathbf{w} \rangle := \langle \boldsymbol{\mu}, \mathbf{w} \rangle, \quad \boldsymbol{\mu} \in \mathbf{M}_h, \quad \langle \boldsymbol{\Pi}^* \boldsymbol{\mu}, \mathbf{w} \rangle := \langle \boldsymbol{\mu}, \mathbf{w} \rangle, \quad \mathbf{w} \in \mathbf{W}_h. \quad (2.8)$$

Then it is easy to see that $\langle \boldsymbol{\mu}, \boldsymbol{\Pi} \mathbf{w} \rangle = \langle \boldsymbol{\Pi}^* \boldsymbol{\mu}, \mathbf{w} \rangle$. It is well known that these operators are stable and satisfy suitable approximation properties, [58, Chapters 1.2.1 and 1.2.2]. We note that due to the biorthogonality of the basis functions of \mathbf{M}_h and \mathbf{W}_h a local support is preserved under the mappings $\boldsymbol{\Pi}$ and $\boldsymbol{\Pi}^*$.

3. Error estimator and a priori analysis. Our error estimator is defined in terms of equilibrated fluxes. Equilibrated fluxes are well established and often used for an adaptive error control. We refer to the monographs [2, 6, 55] and the references therein. The basic ideas can be found in the early works [35, 39], and general equilibration techniques for problems in structural mechanics are presented in [40, 48]. Equilibrated fluxes in linear elasticity reflect the duality between displacement and traction. From the mathematical point of view, they can be analyzed in the framework of mixed finite elements. Knowing the finite element solution of the displacement

based primal formulation, a consistent flux can be easily computed by a local postprocess. Moreover, the so-computed flux satisfies locally the equilibrium condition and can be used to obtain a symmetric and $H(\text{div})$ -conforming approximation for the stress. In contrast to the Laplace operator for which low order $H(\text{div})$ -conforming finite elements for the flux are well known, the construction of symmetric and $H(\text{div})$ -conforming stress approximations is much more involved. There exists no low order finite element, see [4]. Therefore, we have to work with a discrete space for the stress which includes locally cubic polynomials. However in the context of a posteriori error estimates, this stress approximation can be easily obtained by a local postprocess from the finite element displacement. Moreover it can provide an upper bound for the error where the constant is one which is of special interest within an adaptive error control. This is not the case if we work with the simpler edge related approach based on equilibrated fluxes or with a standard residual type estimator. A posteriori error estimates for the displacements in terms of local surface tractions are also considered in [17, 36, 47, 49, 50]. Here, we use these ideas and extend the approach to the variational inequality setting.

3.1. Definition of the error estimator. Let us assume from now on that $\boldsymbol{\lambda}_h$ is known. Then using the equivalence between (2.6) and (2.7), we find that \mathbf{u}_h satisfies a variational equality, where $\boldsymbol{\lambda}_h$ plays the role of a Neumann boundary condition on Γ_C , i.e.,

$$a(\mathbf{u}_h, \mathbf{v}) = f(\mathbf{v}) - \langle \boldsymbol{\lambda}_h, \mathbf{v} \rangle, \quad \mathbf{v} \in \mathbf{V}_h. \quad (3.1)$$

Following the construction in [2], we define locally for each edge e of the triangulation \mathcal{T}_h a flux $\mathbf{g}_e \in [P_1(e)]^2$ such that for all $T \in \mathcal{T}_h$ and $\mathbf{v} \in [P_1(T)]^2$ the local equilibrium

$$a_T(\mathbf{u}_h, \mathbf{v}) = f_T(\mathbf{v}) + \sum_{e \subset \partial T} \int_e (\mathbf{n}_e \cdot \mathbf{n}_T) \mathbf{g}_e \cdot \mathbf{v} \, ds \quad (3.2)$$

is satisfied. Here $a_T(\cdot, \cdot)$ and $f_T(\cdot)$ denote the elementwise contribution of the bilinear form $a(\cdot, \cdot)$ and the linear form $f(\cdot)$, respectively, and \mathbf{n}_e stands for a fixed unit normal on the edge e , and \mathbf{n}_T is the outer unit normal on ∂T . If $e \subset \partial\Omega$, we set $\mathbf{n}_e = \mathbf{n}$. Additionally, we set on the homogeneous Neumann boundary part Γ_N the flux to be zero, i.e., $\mathbf{g}_e := \mathbf{0}$. To define \mathbf{g}_e on the contact boundary, we use $\boldsymbol{\lambda}_h$ and set for each edge e on Γ_C

$$\int_e \mathbf{g}_e \cdot \mathbf{v} \, ds := - \int_e \boldsymbol{\lambda}_h \cdot \mathbf{v} \, ds, \quad \mathbf{v} \in [P_1(e)]^2. \quad (3.3)$$

Using the moments of \mathbf{g}_e as degrees of freedom gives rise to a local system at each node of the mesh, see, e.g., [2, 39]. The associated matrix is singular for all inner vertices. At the vertices on the Neumann or on the contact boundary, we obtain an over-determined system. In all cases, the solvability of the local systems is guaranteed by (3.1). We note that in our definition Γ_C is treated as a Neumann boundary and that the exact surface traction $\boldsymbol{\lambda}$ is replaced by a discrete one, i.e., by $\boldsymbol{\lambda}_h$. A unique solution for the equilibrated fluxes can be obtained by solving a minimization problem, i.e., \mathbf{g}_e is as close as possible to the average of the discrete flux $\{\boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}_e\}$. In order to preserve the locality, we do not minimize $\sum_{e \in \mathcal{E}_h} \|\mathbf{g}_e - \{\boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}_e\}\|_{0;e}^2$ but minimize the difference between the moments of the equilibrated flux and the average of the discrete flux. Here \mathcal{E}_h denotes the set of all edges in \mathcal{T}_h . We refer to [2] for details regarding the structure of the linear systems, the minimization step and the different cases of vertices associated with the interior of the domain or boundary conditions.

In terms of the equilibrated fluxes, we construct a locally defined but globally $H(\text{div})$ -conforming approximation $\boldsymbol{\sigma}_h$ of the stress $\boldsymbol{\sigma}(\mathbf{u})$. To do so, we use Arnold–Winther elements, see [4, 57]. The stress approximation and error estimator are defined in the same way as in [44] for the Lamé equation. The main difference is in the computation of the equilibrated fluxes on the possible contact zone Γ_C . This step has been worked out in [60] for the more general case of a two-body contact problem. However in [60], the upper and lower bound for the discretization error are not strong enough to guarantee an error decay for the adaptive refinement process. In contrast to the linear

Lamé equation, the unknown contact forces have to be replaced by the discrete approximation. For convenience of the reader, we recall the basic steps and refer to [44, 60] for details.

The Arnold–Winther element is locally defined on T by the 24-dimensional space

$$X_T := \{ \boldsymbol{\tau}_h \in [P_3(T)]^{2 \times 2}, (\boldsymbol{\tau}_h)_{12} = (\boldsymbol{\tau}_h)_{21}, \operatorname{div} \boldsymbol{\tau}_h \in [P_1(T)]^2 \}, \quad T \in \mathcal{T}_h,$$

and a global finite element space X_h which is $H(\operatorname{div})$ -conforming can be obtained using

- the nodal values (3 dof) at each node p ,
- the zero and first order moments of $\boldsymbol{\tau}_h \mathbf{n}_e$ (4 dof) on each edge e ,
- the mean value (3 dof) on each element T

as degrees of freedom, see [4]. We note that the subset of Γ_C where the body is actually in contact with the rigid obstacle is not known a priori. Thus the contact problem can be regarded as a free boundary value problem. In the following, we assume that the actual discrete contact set is a compact subset of Γ_C in the sense that $\boldsymbol{\lambda}_h = \sum_{p \in \mathcal{P}_C} \boldsymbol{\beta}_p \psi_p$ and $\boldsymbol{\beta}_p = \mathbf{0}$ if $p \in \partial\Gamma_C$.

We define our stress approximation $\boldsymbol{\sigma}_h$ of $\boldsymbol{\sigma}(\mathbf{u})$ by setting

$$\boldsymbol{\sigma}_h(p) := \frac{1}{N_T^p} \sum_{T \in \mathcal{T}_p} \boldsymbol{\sigma}(\mathbf{u}_h)|_T(p) + \boldsymbol{\alpha}(p), \quad (3.4)$$

$$\int_e \boldsymbol{\sigma}_h \mathbf{n}_e \cdot \mathbf{q} \, ds := \int_e \mathbf{g}_e \cdot \mathbf{q} \, ds, \quad \mathbf{q} \in [P_1(e)]^2, \quad (3.5)$$

$$\int_T \boldsymbol{\sigma}_h : \nabla \mathbf{v} \, dx := a_T(\mathbf{u}_h, \mathbf{v}), \quad \mathbf{v} \in [P_1(T)]^2. \quad (3.6)$$

Here, \mathcal{T}_p denotes the set of all triangles having the node p as vertex, and N_T^p is the number of those triangles. For each node p not on $\partial\Omega \setminus \Gamma_D$, $\boldsymbol{\alpha}(p) = \mathbf{0}$. Otherwise, it is defined such that $\boldsymbol{\alpha}(p)$ is a symmetric 2×2 matrix, $\boldsymbol{\alpha}_{11}(p)^2 + 2\boldsymbol{\alpha}_{12}(p)^2 + \boldsymbol{\alpha}_{22}(p)^2$ is minimal and $\boldsymbol{\sigma}_h(p) \mathbf{n} = \mathbf{0}$ for each node p on $\bar{\Gamma}_N$ and $\boldsymbol{\sigma}_h(p) \mathbf{n} = -\boldsymbol{\lambda}_h(p) = -\boldsymbol{\beta}_p$ for each node p on Γ_C . If p is a corner point of the boundary \mathbf{n} is not well defined, and we understand the notation $\boldsymbol{\sigma}_h(p) \mathbf{n} = \mathbf{0}$ such that $\boldsymbol{\sigma}_h(p) = \mathbf{0}$. We note that due to the continuity of the elements in \mathbf{M}_h , $\boldsymbol{\alpha}(p)$ is well defined. Moreover due to the symmetry of $\boldsymbol{\sigma}_h$, (3.6) yields only three independent conditions on each element.

Observing that the normal component of the discrete Lagrange multiplier does not have to be positive on Γ_C , we cannot conclude that $b(\mathbf{u}, \boldsymbol{\lambda}_h) \leq 0$. To obtain suitable upper bounds for the error, we introduce an operator $\mathbf{P}_{\mathbf{u}_h}$ which depends on the finite element solution \mathbf{u}_h . This operator maps the normal component of $\boldsymbol{\lambda}_h$ on a non-negative function. A first step towards the definition of $\mathbf{P}_{\mathbf{u}_h}$ is the introduction of a mesh dependent enlarged support of \mathbf{u}_h by

$$\operatorname{supp} \mathbf{u}_h \subset \operatorname{supp}_h \mathbf{u}_h := \bigcup_{\bar{e} \cap \operatorname{supp} \mathbf{u}_h \neq \emptyset} \bar{e},$$

where we understand the notation $\operatorname{supp} \mathbf{u}_h$ as the support of $(\mathbf{u}_h)_n$. The left picture of Figure 3.1 shows the support of \mathbf{u}_h , whereas $\operatorname{supp}_h \mathbf{u}_h$ is depicted in the right picture.

Now, we decompose the set \mathcal{E}_h^C of boundary edges $e \subset \Gamma_C$ into three disjoint subsets. \mathcal{E}_h^s stands for the set of all edges $e \subset \operatorname{supp} \mathbf{u}_h$; \mathcal{E}_h^i is defined as set of all edges $e \in \mathcal{E}_h^C$ such that $e \subset \Gamma_C \setminus \operatorname{supp}_h \mathbf{u}_h$ and $\mathcal{E}_h^b := \mathcal{E}_h^C \setminus (\mathcal{E}_h^s \cup \mathcal{E}_h^i)$. It is easy to see that the elements $e \in \mathcal{E}_h^b$ can also be characterized by $e \subset \operatorname{supp}_h \mathbf{u}_h \setminus \operatorname{supp} \mathbf{u}_h$. For each $e \in \mathcal{E}_h^b$, we define a neighborhood γ_e by

$$\bar{\gamma}_e := \bar{e} \cup \bigcup_{e_s \in \mathcal{E}_h^s; \bar{e}_s \cap \bar{e} \neq \emptyset} \bar{e}_s. \quad (3.7)$$

The idea is now to construct the operator $\mathbf{P}_{\mathbf{u}_h}$ such that the mean value is locally preserved, $\mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h$ is zero on $\operatorname{supp} \mathbf{u}_h$ and $\mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h \geq 0$. Therefore we introduce the following assumption.

ASSUMPTION 3.1. *For each edge $e \subset \operatorname{supp} \boldsymbol{\lambda}_h \cap \operatorname{supp} \mathbf{u}_h$, we assume that there exists an adjacent edge \hat{e} such that $\hat{e} \subset \Gamma_C \setminus \operatorname{supp} \mathbf{u}_h$.*

This assumption is equivalent to for each edge $e \subset \operatorname{supp} \boldsymbol{\lambda}_h \cap \operatorname{supp} \mathbf{u}_h$, there exists a $\hat{e} \in \mathcal{E}_h^b$ such that $e \subset \gamma_{\hat{e}}$, where $\gamma_{\hat{e}}$ is defined by (3.7).

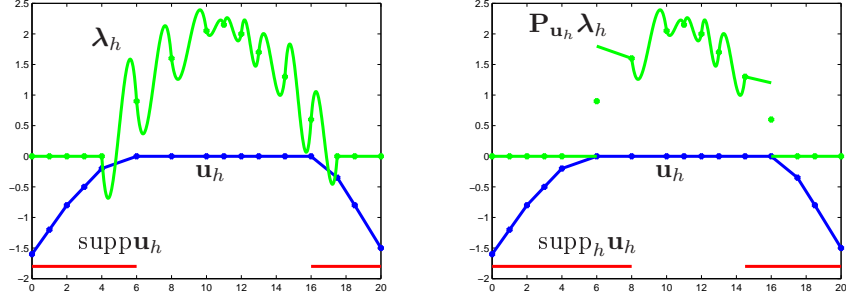


FIGURE 3.1. Orthogonality between the normal components of \mathbf{u}_h and $\boldsymbol{\lambda}_h$ (left) and $\mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h$ (right)

REMARK 3.2. This assumption excludes isolated nodes p with $\mathbf{u}_h(p) = \mathbf{0}$ and $\boldsymbol{\lambda}_h(p) \neq \mathbf{0}$. These situations can easily occur for coarse meshes but not asymptotically. Such a situation for $h \rightarrow 0$ corresponds to a Lagrange multiplier which is represented by a Delta distribution which is not in \mathbf{M} .

The definition of \mathbf{M}_h^+ yields that on each edge $e \in \mathcal{E}_h^C$, we can write $\boldsymbol{\mu}_h \in \mathbf{M}_h^+$ as $\boldsymbol{\mu}_h = (\alpha_e^1 \psi_e^1 + \alpha_e^2 \psi_e^2) \mathbf{n}$, where $\alpha_e^1, \alpha_e^2 \geq 0$, and ψ_e^1, ψ_e^2 are the local nodal dual basis functions. In terms of these preliminary observations, we define $\mathbf{P}_{\mathbf{u}_h} \boldsymbol{\mu}_h, \boldsymbol{\mu}_h \in \mathbf{M}_h^+$, locally on each edge $e \in \mathcal{E}_h^C$ by

$$\mathbf{P}_{\mathbf{u}_h} \boldsymbol{\mu}_h := \begin{cases} \mathbf{0} & e \in \mathcal{E}_h^s \\ \boldsymbol{\mu}_h & e \in \mathcal{E}_h^i \text{ and if } (\boldsymbol{\mu}_h)_n \geq 0 \text{ on } e \\ (\alpha_e^1 \varphi_e^1 + \alpha_e^2 \varphi_e^2) \mathbf{n} & e \in \mathcal{E}_h^i \text{ and otherwise} \\ (\tilde{\alpha}_e^1 \varphi_e^1 + \tilde{\alpha}_e^2 \varphi_e^2) \mathbf{n} & e \in \mathcal{E}_h^b \end{cases}, \quad (3.8)$$

where φ_e^1, φ_e^2 are the local nodal Lagrange basis functions associated with the edge e and $\tilde{\alpha}_e^i := \alpha_e^i w_e^i$, where $w_e^i = \text{meas}(\text{supp } \psi_{p_{ge(i)}}) / \text{meas}(e)$ if $\text{supp } \psi_{p_{ge(i)}} \subset \text{supp}_h \mathbf{u}_h$ and $w_e^i := 1$ otherwise. Here $\psi_{p_{ge(i)}}$ stands for the global dual basis function associated with the node $p_{ge(i)}$ which can be identified with the local node i of the edge e . We remark that in the case of a uniform mesh $w_e^i \in \{1, 2\}$. As it can be easily verified, we obtain $(\mathbf{P}_{\mathbf{u}_h} \boldsymbol{\mu}_h)_n \geq 0$ and $\text{meas}(\text{supp } \mathbf{u}_h \cap \text{supp } \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\mu}_h) = 0$. Moreover, by construction of w_e^i , $\mathbf{P}_{\mathbf{u}_h}$ locally preserves the mean value, if Assumption 3.1 is satisfied.

Now we are in the situation to define the components of our error estimator. As it is quite standard, the global error estimator for the energy norm $\|\mathbf{v}\|_a^2 := a(\mathbf{v}, \mathbf{v})$ of the error in the displacement is given in terms of local contributions,

$$\eta^2 := \sum_{T \in \mathcal{T}_h} \eta_T^2, \quad \eta_T^2 := \|\mathcal{C}^{-1/2}(\boldsymbol{\sigma}_h - \boldsymbol{\sigma}(\mathbf{u}_h))\|_{0;T}^2.$$

In addition to η , we define the quantity

$$\eta_C^2 := \sum_{e \in \mathcal{E}_h^C} \eta_e^2, \quad \eta_e^2 := \frac{h_e}{\sqrt{2\mu}} \|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{0;e}^2. \quad (3.9)$$

3.2. Upper bound for the discretization error. In this subsection, we show that the error estimator yields an upper bound for the discretization error. A preliminary step is to consider the divergence of the stress approximation. We recall a result which has been shown for the more general case of a two-body contact problem in [60] and note that the proof also applies for our more simpler situation of a one-body contact problem.

LEMMA 3.3. *i) Let $\boldsymbol{\sigma}_h \in X_h$ be defined such that (3.5) and (3.6) hold. Then,*

$$\text{div } \boldsymbol{\sigma}_h = -\boldsymbol{\Pi}_1 \mathbf{f},$$

where Π_1 is the L^2 -projection onto piecewise affine functions.

ii) Let $\sigma_h \in X_h$ be defined such that (3.4) and (3.5) hold. Then,

$$(\sigma_h \mathbf{n})|_{\Gamma_N} = \mathbf{0}, \quad \text{and} \quad (\sigma_h \mathbf{n})|_{\Gamma_C} = -\lambda_h.$$

As it is standard for a posteriori estimates, we define an oscillation term which only depends on the given data

$$\xi^2 := \sum_{T \in \mathcal{T}_h} \xi_T^2, \quad \xi_T^2 := \frac{h_T^2}{2\mu} \|\mathbf{f} - \Pi_1 \mathbf{f}\|_{0;T}^2.$$

In the case of more general boundary conditions additional terms reflecting the approximation error in the Neumann and Dirichlet boundary condition enters into the definition of ξ , see, e.g., [2]. We note that in contrast to [60] no term depending on the unknown solution on Γ_C enters. Thus we can control ξ within an adaptive refinement process.

Lemma 3.3 results in an upper bound for the discretization error. In a first step, we show that the discretization error can be bounded by $\eta + \eta_C$. To estimate the discretization error in terms of the error estimator, the difference $\sigma(\mathbf{u}) - \sigma_h$ has to be considered.

THEOREM 3.4. *Under Assumption 3.1, there exist constants $C_1, C_2 < \infty$ independent of the mesh-size such that*

$$\|\mathbf{u} - \mathbf{u}_h\|_a \leq \eta + C_1 \eta_C + C_2 \xi. \quad (3.10)$$

Proof. Using the symmetry of Hooke's tensor, we find for the energy norm of the discretization error in the displacement

$$\begin{aligned} \|\mathbf{u} - \mathbf{u}_h\|_a^2 &= \int_{\Omega} (\sigma(\mathbf{u}) - \sigma(\mathbf{u}_h)) : (\varepsilon(\mathbf{u}) - \varepsilon(\mathbf{u}_h)) \, dx \\ &= \int_{\Omega} (\sigma(\mathbf{u}) - \sigma_h) : (\varepsilon(\mathbf{u}) - \varepsilon(\mathbf{u}_h)) \, dx \\ &\quad + \int_{\Omega} \mathcal{C}^{-1/2} (\sigma_h - \sigma(\mathbf{u}_h)) : \mathcal{C}^{1/2} (\varepsilon(\mathbf{u}) - \varepsilon(\mathbf{u}_h)) \, dx \\ &\leq \eta \|\mathbf{u} - \mathbf{u}_h\|_a + \int_{\Omega} (\sigma(\mathbf{u}) - \sigma_h) : (\varepsilon(\mathbf{u}) - \varepsilon(\mathbf{u}_h)) \, dx. \end{aligned} \quad (3.11)$$

Now we have to consider the second term on the right side of (3.11) in more detail. Due to the symmetry and the $H(\text{div})$ -conformity of σ_h and $\sigma(\mathbf{u})$, we can apply integration by parts. Then, the homogeneous Neumann boundary condition on Γ_N , the fact that $\mathbf{u} - \mathbf{u}_h = \mathbf{0}$ on Γ_D and Lemma 3.3 yield

$$\begin{aligned} \int_{\Omega} (\sigma(\mathbf{u}) - \sigma_h) : (\varepsilon(\mathbf{u}) - \varepsilon(\mathbf{u}_h)) \, dx &= \int_{\Omega} (\sigma(\mathbf{u}) - \sigma_h) : (\nabla(\mathbf{u} - \mathbf{u}_h)) \, dx \\ &= - \int_{\Omega} \text{div} (\sigma(\mathbf{u}) - \sigma_h) \cdot (\mathbf{u} - \mathbf{u}_h) \, dx + \int_{\partial\Omega} (\sigma(\mathbf{u}) - \sigma_h) \mathbf{n} \cdot (\mathbf{u} - \mathbf{u}_h) \, ds \\ &= \int_{\Omega} (\mathbf{f} - \Pi_1 \mathbf{f}) \cdot (\mathbf{u} - \mathbf{u}_h) \, dx - b(\mathbf{u} - \mathbf{u}_h, \lambda - \lambda_h) \\ &\leq C \left(\sum_{T \in \mathcal{T}_h} \frac{h_T^2}{2\mu} \|\mathbf{f} - \Pi_1 \mathbf{f}\|_{0;T}^2 \right)^{\frac{1}{2}} \|\mathbf{u} - \mathbf{u}_h\|_a - b(\mathbf{u} - \mathbf{u}_h, \lambda - \lambda_h). \end{aligned}$$

Using the orthogonalities, $b(\mathbf{u}_h, \lambda_h) = 0$ and $b(\mathbf{u}, \lambda) = 0$, the sign properties $\lambda \in \mathbf{M}^+$, $\lambda_h \in \mathbf{M}_h^+$, the conformity $\mathbf{K}_h \subset \mathbf{K}$ and $\text{meas}(\text{supp} \mathbf{u}_h \cap \text{supp} \mathbf{P}_{\mathbf{u}_h} \lambda_h) = 0$, we find

$$\begin{aligned} b(\mathbf{u}_h - \mathbf{u}, \lambda - \lambda_h) &= b(\mathbf{u}, \lambda_h) + b(\mathbf{u}_h, \lambda) \leq b(\mathbf{u}, \lambda_h - \mathbf{P}_{\mathbf{u}_h} \lambda_h) + b(\mathbf{u}, \mathbf{P}_{\mathbf{u}_h} \lambda_h) \\ &\leq b(\mathbf{u}, \lambda_h - \mathbf{P}_{\mathbf{u}_h} \lambda_h) = b(\mathbf{u} - \mathbf{u}_h, \lambda_h - \mathbf{P}_{\mathbf{u}_h} \lambda_h) \\ &\leq \sum_{e \in \mathcal{E}_h^C} \|\mathbf{u} - \mathbf{u}_h\|_{\frac{1}{2};e} \|\lambda_h - \mathbf{P}_{\mathbf{u}_h} \lambda_h\|_{-\frac{1}{2};e} \\ &\leq C \|\mathbf{u} - \mathbf{u}_h\|_a \left(\sum_{e \in \mathcal{E}_h^C} \frac{1}{2\mu} \|\lambda_h - \mathbf{P}_{\mathbf{u}_h} \lambda_h\|_{-\frac{1}{2};e}^2 \right)^{\frac{1}{2}}. \end{aligned}$$

To bound the last term by η_C , we have to exploit the special structure of $\mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h$. Let $e \in \mathcal{E}_h^i$, then $\boldsymbol{\Pi}_{0;e} \boldsymbol{\lambda}_h = \boldsymbol{\Pi}_{0;e} \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h$, where $\boldsymbol{\Pi}_{0;e}$ is the local L^2 -projection onto $[P_0(e)]^2$ and thus

$$\|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{-\frac{1}{2};e}^2 \leq Ch_e \|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{0;e}^2.$$

For each edge $e \in \mathcal{E}_h^b$, we find

$$\|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{-\frac{1}{2};e}^2 \leq \|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{-\frac{1}{2};\gamma_e}^2 \leq Ch_e \|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{0;\gamma_e}^2.$$

Here, we have used the definition of $\tilde{\alpha}_e^i$ and the fact that $\mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h = \mathbf{0}$ on $e \in \mathcal{E}_h^s$ yielding $\int_{\gamma_e} \boldsymbol{\lambda}_h ds = \int_{\gamma_e} \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h ds$. If $e \in \mathcal{E}_h^s$ and $e \subset \Gamma_C \setminus \text{supp } \boldsymbol{\lambda}_h$, then $\boldsymbol{\lambda}_h = \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h = \mathbf{0}$ and it trivially holds that $\|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{-\frac{1}{2};e}^2 \leq Ch_e \|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{0;e}^2$. For all other $e \in \mathcal{E}_h^C$, we find $e \subset \text{supp } \boldsymbol{\lambda}_h \cap \text{supp } \mathbf{u}_h$, and thus by Assumption 3.1 there exists an edge $\hat{e} \in \mathcal{E}_h^b$ such that $e \subset \gamma_{\hat{e}}$. This observation in combination with the local quasi-uniformity of the mesh gives the upper bound

$$\|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{-\frac{1}{2};e}^2 \leq \|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{-\frac{1}{2};\gamma_{\hat{e}}}^2 \leq Ch_e \|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{0;\gamma_{\hat{e}}}^2.$$

□

We note that no constant depending on Korn's inequality or on the shape regularity of the mesh or on the Lamé parameters enters as factor in front of η . The special situation of the variational inequality does not enter directly into the definition of η . It is only reflected by the term η_C . As it is shown in [60], η_C can be bounded by an additional higher order term on the contact boundary involving the unknown solution. This type of term also enters for general non-homogeneous Neumann boundary conditions. Unfortunately, $\boldsymbol{\lambda}$ is not a given data, and thus we cannot control this oscillation term within our adaptive refinement algorithm. The next theorem provides an upper bound for the discretization error in terms of η and the data oscillation.

THEOREM 3.5. *Under Assumption 3.1, there exists a constant $C < \infty$ independent of the mesh-size such that*

$$\|\mathbf{u} - \mathbf{u}_h\|_a \leq C(\eta + \xi).$$

Proof. Using the result of Theorem 3.4, we have to consider η_C in more detail and bound it by η . We observe that under Assumption 3.1, for each $e \in \mathcal{E}_h^C$ there exists a local $\omega_e \supset e$ which includes at most e and the two adjacent edges such that

$$\int_{\omega_e} \boldsymbol{\lambda}_h ds = \int_{\omega_e} \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h ds.$$

The definitions of $\mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h$ and of $\boldsymbol{\sigma}_h$ now guarantee that

$$\|\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h\|_{0;e} \leq Ch_e |\boldsymbol{\lambda}_h|_{1;\omega_e} \leq C \|\boldsymbol{\lambda}_h + \boldsymbol{\sigma}(\mathbf{u}_h) \mathbf{n}\|_{0;\omega_e} = C \|\boldsymbol{\sigma}(\mathbf{u}_h) \mathbf{n} - \boldsymbol{\sigma}_h \mathbf{n}\|_{0;\omega_e}.$$

Let \mathcal{T}_e be the subset of elements in \mathcal{T}_h such that each $T \in \mathcal{T}_e$ contains one edge of ω_e . We note that the number of elements in \mathcal{T}_e is bounded by three. Then, we find in terms of standard scaling arguments and a discrete inverse estimate

$$\eta_e^2 \leq C \sum_{T \in \mathcal{T}_e} \eta_T^2$$

and thus $\eta_C \leq C\eta$. □

REMARK 3.6. *The proof of Theorem 3.5 shows that η_C can be bounded by η . More precisely*

$$\eta_C^2 \leq C \sum_{e \in \mathcal{E}_h^C} \sum_{T \in \mathcal{T}_e} \eta_T^2 \leq \beta(h)^2 \eta^2,$$

where $\beta(h) \leq C$ and $\mathcal{E}_h^n \subset \mathcal{E}_h^C$ such that $\boldsymbol{\lambda}_h - \mathbf{P}_{\mathbf{u}_h} \boldsymbol{\lambda}_h$ restricted to e is not equal to zero. Then Theorem 3.4 yields

$$\|\mathbf{u} - \mathbf{u}_h\|_a \leq (1 + C_1\beta(h))\eta + C_2\xi.$$

The numerical results show that the number of edges in \mathcal{E}_h^n is bounded by a small number n_m independently of h . For most examples, we find $n_m = 4$. We note that if $\beta(h)$ tends asymptotically to zero, then the upper bound $1 + C_1\beta(h)$ tends to one.

COROLLARY 3.7. *There exists a constant independent of the mesh-size such that*

$$J(\mathbf{u}_h) - J(\mathbf{u}) \leq C(\eta^2 + \xi^2),$$

where the energy $J(\mathbf{v})$ is given by $J(\mathbf{v}) := \frac{1}{2}a(\mathbf{v}, \mathbf{v}) - f(\mathbf{v})$.

Proof. The proof of Theorem 3.4 shows that we have the stronger estimate

$$\|\mathbf{u} - \mathbf{u}_h\|_a^2 - b(\mathbf{u}_h, \boldsymbol{\lambda}) \leq (\eta + C_1\eta_C + C_2\xi)\|\mathbf{u} - \mathbf{u}_h\|_a.$$

A straightforward computation and Theorem 3.4 and Theorem 3.5 yield that

$$\begin{aligned} J(\mathbf{u}_h) - J(\mathbf{u}) &= \frac{1}{2}\|\mathbf{u} - \mathbf{u}_h\|_a^2 - b(\mathbf{u}_h, \boldsymbol{\lambda}) \leq \|\mathbf{u} - \mathbf{u}_h\|_a^2 - b(\mathbf{u}_h, \boldsymbol{\lambda}) \\ &\leq (\eta + C_1\eta_C + C_2\xi)^2 \leq C(\eta^2 + \xi^2). \end{aligned}$$

□

REMARK 3.8. *The proof of Theorem 3.4 shows that the constants in the upper bound (3.10) depend on the constant in Korn's inequality but do not depend on the Lamé parameters. In particular in the nearly incompressible limit, i.e., $\lambda \rightarrow \infty$, the constants C_1 and C_2 in (3.10) are uniformly bounded. This is not the case for the constant in Theorem 3.5 and Corollary 3.7. Here the continuity constant of Hooke's tensor \mathcal{C} enters.*

3.3. Lower bound for the discretization error. In this subsection, we provide a local upper bound for our error estimator. The structure of this subsection follows [60], where the more general situation of a two-body problem is considered. However only a weaker result involving additional terms depending on the unknown contact stress $\boldsymbol{\lambda}$ and the displacement on the contact boundary has been established. Following the proof given in [60] for the two-body case, we get

$$\begin{aligned} \eta_T^2 &\leq C \sum_{e \in \mathcal{E}_T^f} h_e (\|\mathbf{g}_e - \{\mathcal{C}\boldsymbol{\varepsilon}(\mathbf{u}_h)\}\mathbf{n}_e\|_{0;e}^2 + \|[\mathcal{C}\boldsymbol{\varepsilon}(\mathbf{u}_h)]\mathbf{n}_e\|_{0;e}^2) \\ &\quad + \sum_{e \in \mathcal{E}_T^C} h_e \|\boldsymbol{\lambda}_h + \boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}\|_{0;e}^2, \end{aligned}$$

where \mathcal{E}_T^C is the subset of edges which have a vertex of T as endpoint and which are on the contact boundary Γ_C and $\mathcal{E}_T^f := \mathcal{E}_T \setminus \mathcal{E}_T^C$. Here \mathcal{E}_T denotes all edges sharing one vertex with T . The proof of this local upper bound is based on a discrete mesh dependent norm which is equivalent to the L^2 -norm on X_T . This equivalence has been shown in [4] and has been also used in [44].

The first two terms are standard terms in the definition of a residual based and an equilibrated flux based error estimator, [2, 6, 54]. Both of them are bounded in terms of the local error contribution and higher order terms. Because $e \in \mathcal{E}_T^f$ is an interior edge or an edge on $\overline{\Gamma_D \cup \Gamma_N}$, and the arguments in the proof are local ones, the upper bound taken from the linear setting of a variational equality also applies to our variational inequality setting. We recall that we have homogeneous Neumann boundary conditions, and thus no additional term reflecting the Neumann data oscillations occurs.

To bound $h_e \|\boldsymbol{\lambda}_h + \boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}\|_{0;e}^2$, $e \in \mathcal{E}_T^C$, $e \subset \partial T$, we apply the triangle inequality, the definition of $\boldsymbol{\Pi}^*$ given in (2.8), the biorthogonality and use the discrete inf-sup condition

$$\begin{aligned} \|\boldsymbol{\lambda}_h + \boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}\|_{0;e} &\leq \|\boldsymbol{\lambda}_h + \boldsymbol{\Pi}^* \boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}\|_{0;e} + \|\boldsymbol{\Pi}^* \boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n} - \boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}\|_{0;e} \\ &\leq \frac{C}{\sqrt{h_e}} \sup_{\varphi_h \in K_e} \int_{\Gamma_C} (\boldsymbol{\lambda}_h + \boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}) \cdot \varphi_h \mathbf{n} \, ds \\ &\quad + C\sqrt{h_e} \sum_{i=1}^2 \|\boldsymbol{\sigma}(\mathbf{u}_h)|_T(p_i^e) - \boldsymbol{\sigma}(\mathbf{u}_h)|_{T_i^e}(p_i^e)\|, \end{aligned} \tag{3.12}$$

where p_i^e , $i = 1, 2$, denote the two endpoints of the edge e and $T_i^e \neq T$ is the element sharing the node p_i^e and having an edge on the contact boundary. If such an element does not exist, i.e., if $p_i^e \in \partial\Gamma_C$, we formally set $T_i^e = T$. The set K_e is given by $K_e := \{\alpha\varphi_{p_1^e} + \beta\varphi_{p_2^e}, |\alpha|, |\beta| \leq 1\}$, and by $\|\cdot\|$ we denote the Euclidean norm. The second term on the right side can easily be bounded by the jump on the edges

$$\sqrt{h_e}\|\sigma(\mathbf{u}_h)|_T(p_i^e) - \sigma(\mathbf{u}_h)|_{T_i^e}(p_i^e)\| \leq C \sum_{\hat{e} \in \mathcal{E}_{p_i^e}} \|[\sigma(\mathbf{u}_h)]\|_{0;\hat{e}} \leq C \sum_{\hat{e} \in \mathcal{E}_{p_i^e}} \|[\sigma(\mathbf{u}_h)\mathbf{n}_{\hat{e}}]\|_{0;\hat{e}},$$

where $\mathcal{E}_{p_i^e}$ stands for the set of all interior edges sharing the node p_i^e . Here we have used that the jump of $\sigma(\mathbf{u}_h)$ on the edges can be bounded by the jump of $\sigma(\mathbf{u}_h)\mathbf{n}$, see [44]. To bound the first term on the right side of (3.12), we apply Green's formula on each element and find for all $\varphi_h \in K_e$

$$\begin{aligned} \int_{\Gamma_C} (\boldsymbol{\lambda}_h + \sigma(\mathbf{u}_h)\mathbf{n}) \cdot \varphi_h \mathbf{n} \, ds &= f(\varphi_h \mathbf{n}) - \sum_{i=1}^2 \sum_{\hat{e} \in \mathcal{E}_{p_i^e}} \int_{\hat{e}} [\sigma(\mathbf{u}_h)\mathbf{n}_{\hat{e}}] \cdot \varphi_h \mathbf{n} \, ds \\ &\leq C \left(\sum_{T \in \mathcal{T}_e} h_T \|\boldsymbol{\Pi}_1 f\|_{0;T} + \sum_{i=1}^2 \sum_{\hat{e} \in \mathcal{E}_{p_i^e}} \sqrt{h_{\hat{e}}} \|[\sigma(\mathbf{u}_h)\mathbf{n}_{\hat{e}}]\|_{0;\hat{e}} \right), \end{aligned}$$

where \mathcal{T}_e stands for the set of all elements which are in the support of $\varphi_{p_1^e}$ and $\varphi_{p_2^e}$, and $\mathcal{E}_{p_i^e}$ is the set of all interior edges having p_i^e as endpoint. Now, combining these estimates, we get the upper bound

$$h_e \|\boldsymbol{\lambda}_h + \sigma(\mathbf{u}_h)\mathbf{n}\|_{0;e}^2 \leq C \left(\sum_{T \in \mathcal{T}_e} h_T^2 \|\boldsymbol{\Pi}_1 f\|_{0;T}^2 + \sum_{i=1}^2 \sum_{\hat{e} \in \mathcal{E}_{p_i^e}} h_{\hat{e}} \|[\sigma(\mathbf{u}_h)\mathbf{n}_{\hat{e}}]\|_{0;\hat{e}}^2 \right). \quad (3.13)$$

All terms on the right hand side appear in the estimates for a residual type error estimator and can be bounded by the local discretization error and by local higher order terms see, e.g., [56]. We recall that the proof involves cubic element and quadratic edge bubbles. Due to the zero values of the element bubble function on ∂T and due to the fact that only interior edges appear, the inequality in our setting is not seen. In general, a posteriori error estimates for linear finite elements involve $\mathbf{f} - \boldsymbol{\Pi}_0 \mathbf{f}$ and not $\mathbf{f} - \boldsymbol{\Pi}_1 \mathbf{f}$. Here, we work with $\boldsymbol{\Pi}_1$ instead of $\boldsymbol{\Pi}_0$ which is motivated by the fact that the Arnold–Winther elements have a divergence in $[P_1(T)]^2$ and not in $[P_0(T)]^2$. However, it can be easily shown that all estimates hold as well. The only difference is that we have to use a three-dimensional space of element bubbles instead of the one-dimensional cubic element bubble. Thus for these terms, the results from the variational equality setting apply also to our variational inequality.

THEOREM 3.9. *The element contribution η_T of the error estimator can be bounded by the error on a local neighborhood and some local oscillation terms*

$$\eta_T^2 \leq C \sum_{\hat{T} \subset \mathcal{T}_T} \left(\|\mathbf{u} - \mathbf{u}_h\|_{a;\hat{T}}^2 + \xi_{\hat{T}}^2 \right),$$

where \mathcal{T}_T is the set of all elements in \mathcal{T}_h having at least one vertex with T in common.

4. Numerical Results. In this section, we apply our error estimator to several contact problems and use it to obtain adaptively generated meshes.

4.1. Square on a plane. In our first example, we consider a square that is pushed onto a rigid plane, see Figure 4.1. The square is given by $\Omega = (0, 1)^2$. In addition to the force applied on the top, we compress the square by forces on the left and the right boundary of the square. An additional issue is to prevent corner singularities, hence we use as boundary force on the non-contact sides $g = -200p\mathbf{n}$, where \mathbf{n} is the outer normal of the corresponding side and $p = x^2(1-x)^2$

on the upper side and $p = y^2(1 - y)^2$ on the left and right side. The material parameters are given by $E = 200$ and $\nu = 0.3$. This problem setting leads to a nontrivial contact zone as can be seen in the right picture of Figure 4.1. Here, the contact pressure is shown. In the middle picture, the effective von Mises stress is given.

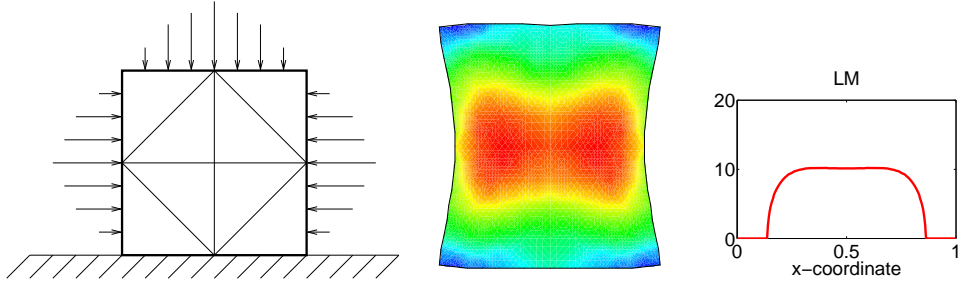


FIGURE 4.1. Square on plane: Problem setting with initial mesh, solution and contact stress

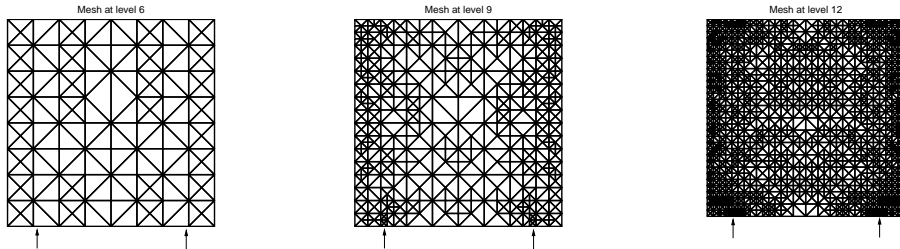


FIGURE 4.2. Square on plane: Mesh on level 6, 9 and 12.

For the mesh refinement, we use a bisection strategy based on the error estimator η . The meshes at different levels are depicted in Figure 4.2. Here, we see that our adaptive strategy leads at the beginning to an almost uniform mesh refinement which can be explained by the high regularity of the solution of the given contact problem. In the middle picture, the mesh on level 9 is shown. We observe at the two endpoints of the contact zone (marked by an arrow) a higher refinement whereas in the interior of the actual contact zone the mesh is relatively coarse.

Additionally, we consider the error reduction, see Figure 4.3. In the first picture, we compare the convergence rates using our adaptive mesh refinement with uniform mesh refinement. Using uniform mesh refinement, we observe an error of $\mathcal{O}(h)$ which indicates that our problem has H^2 -regularity. In the right picture, we compare the estimated error η with the extra term η_C . Here, we define the mean element diameter h by $h := \sqrt{\#\text{ elements}}$. We see that η_C is of higher order compared to η and can thus asymptotically be neglected.

4.2. Square on a circle. In the second example, we push the square of Example 1 on a rigid circle with radius 1 and midpoint $(0.5, -1)$. Here, we apply inhomogeneous Neumann boundary conditions only on the top with $g = 50x(1 - x)\mathbf{n}$. As material parameters, we use $E = 7000$ and $\nu = 0.3$. The problem setting and solution is depicted in Figure 4.4.

In Figure 4.5, we show the meshes obtained by bisection using the error estimator η . Here we see, in comparison to the first example, that the meshes are refined much more locally. As a result, the quantitative error decay obtained by our adaptive algorithm is better than the one obtained by uniform mesh refinement, see Figure 4.6. As in Example 1, we observe that the ratio η_C/η tends asymptotically to zero.

4.3. Square on a triangle. To get contact problems with low regularity, we push the square onto a triangle with different angles α , see Figure 4.7. Here, the regularity of the solution depends on the angle α . In our tests, we use $\alpha = \pi/6$, $\alpha = \pi/4$ and $\alpha = \pi/3$. Here the material parameters

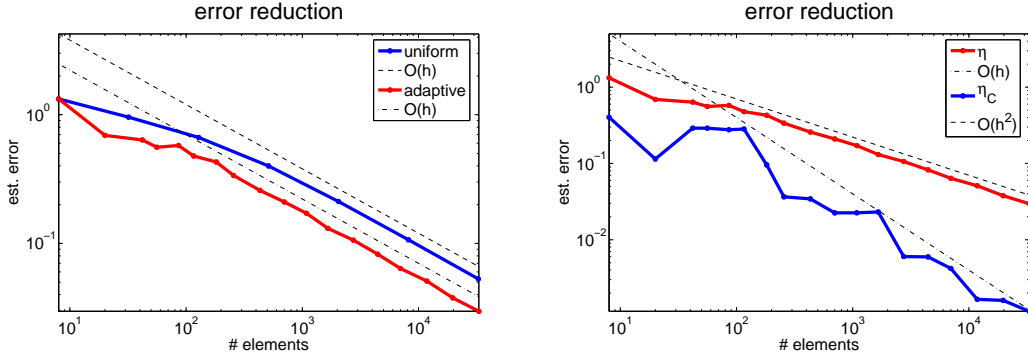


FIGURE 4.3. *Square on plane: Estimated error, left: uniform/adaptive, right: η/η_C .*

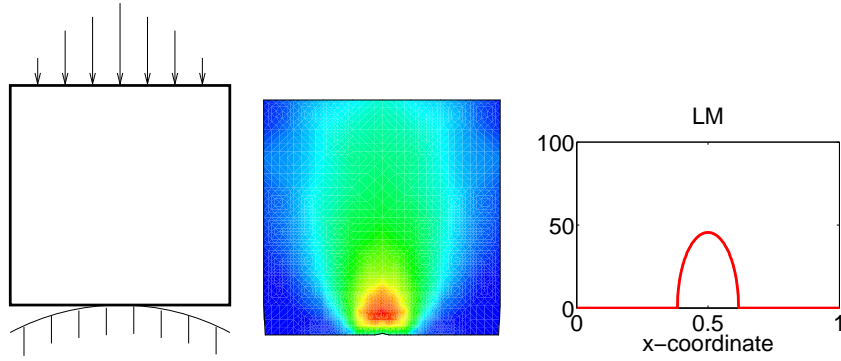


FIGURE 4.4. *Square on circle: Problem setting, solution and contact stress*

of the square are given by $E = 200, \nu = 0.3$. We use the same boundary conditions as in Example 2.

Due to the decreasing regularity for increasing α the adaptive meshes differ for the different values of α , see Figure 4.8. We observe that for $\alpha = \pi/3$, the mesh is much more locally refined compared to $\alpha = \pi/6$.

The regularity can be estimated by observing the convergence rates for the uniform refinement, see Figure 4.9. Here, we get a convergence rate of approximately $\mathcal{O}(h^{0.7})$ for $\alpha = \pi/6$, $\mathcal{O}(h^{0.5})$ for $\alpha = \pi/4$ and $\mathcal{O}(h^{0.3})$ for $\alpha = \pi/3$. However, using adaptive mesh refinement, we observe $\mathcal{O}(h)$ in all cases.

Again we see that the error contribution η_C decreases much faster compared to η , see Figure 4.10. However, for low regularities, we do not observe that η_C is of order $\mathcal{O}(h^2)$. To get a better understanding of the situation, we define

$$\eta_C^{\text{contact}} := \left(\sum_{e \in \mathcal{E}_h^C \setminus \mathcal{E}_h^i} \eta_e^2 \right)^{1/2} \leq \eta_C.$$

If the singularity in λ is small enough, we find asymptotically $\eta_C^{\text{contact}} = \eta_C$ and that η_C is of order $\mathcal{O}(h^2)$. However, for strong singularities in λ , there are non-trivial contributions η_e , $e \in \mathcal{E}_h^i$. If $e \in \mathcal{E}_h^i \cap \mathcal{E}_h^n$ is in the actual contact area of the solution \mathbf{u} , then $\int_e \mathbf{u} \cdot (\lambda_h - \mathbf{P}_{\mathbf{u}_h} \lambda_h) \, ds = 0$ although $\lambda_h \neq \mathbf{P}_{\mathbf{u}_h} \lambda_h$. This is the case in our situation, thus the error is bounded by $\eta + C_1 \eta_C^{\text{contact}} + C_2 \xi$, and $\eta_C^{\text{contact}}/\eta$ tends to zero for all three values of α .

5. Upper bound for the error in the Lagrange multiplier. In this section, we show that the error in the Lagrange multiplier can be bounded in terms of the discretization error in the displacement and additional data oscillation terms. The abstract framework of mixed finite

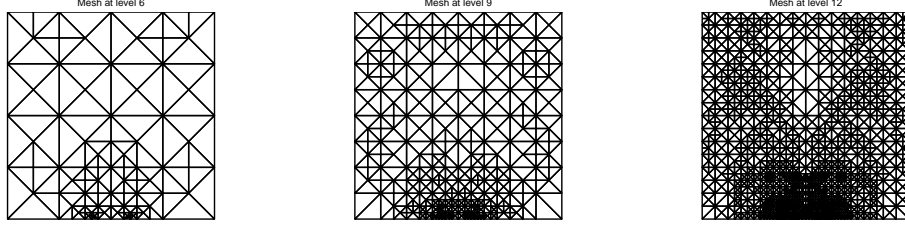
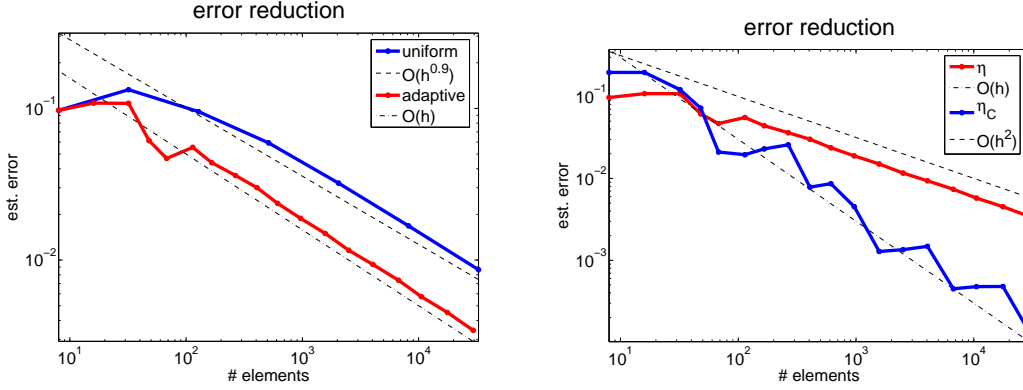


FIGURE 4.5. Square on circle: Mesh on level 6, 9 and 12.

FIGURE 4.6. Square on circle: Estimated error, left: uniform/adaptive, right: η/η_C .

elements in combination with a discrete uniform inf-sup condition yields the standard a priori estimate

$$\|\boldsymbol{\lambda} - \boldsymbol{\lambda}_h\|_{-\frac{1}{2};\Gamma_C} \leq C \left(\inf_{\boldsymbol{\mu}_h \in \mathbf{M}_h} \|\boldsymbol{\lambda} - \boldsymbol{\mu}_h\|_{-\frac{1}{2};\Gamma_C} + \|\mathbf{u} - \mathbf{u}_h\|_a \right).$$

If the solution is smooth enough the first term on the right side is $\mathcal{O}(h^{3/2})$ whereas the second term is in general only of order h . Unfortunately, the first term cannot be controlled a priori because the contact stress is not a given data.

Let $\mathbf{V}_{0;h} := \mathbf{V}_h \cap [H_0^1(\Omega)]^2$, then there exists a space \mathbf{X}_h such that $\dim \mathbf{X}_h = \dim \mathbf{V}_{0;h}$ and moreover $\mathbf{X}_h = \text{span}\{\chi_p \mathbf{e}_i, i = 1, 2, p \in \mathcal{P}_h^0\}$, where the basis functions χ_p satisfy

- $\int_{\Omega} \chi_p \varphi_q \, dx = \delta_{pq} \int_{\Omega} \varphi_q \, dx$,
- $\sum_{p \in \mathcal{P}_h^0} \chi_p = 1$,
- $\text{supp} \chi_p = \text{supp} \varphi_p, p \in \tilde{\mathcal{P}}_h^0$.

Here \mathcal{P}_h^0 stands for the set of all nodes in the interior of Ω and $\tilde{\mathcal{P}}_h^0 \subset \mathcal{P}_h^0$ such that $\text{supp} \varphi_p \subset \Omega$ for $p \in \tilde{\mathcal{P}}_h^0$. For $p \in \tilde{\mathcal{P}}_h^0$, we set $\chi_p = 3\varphi_p - \sum_{q \in \mathcal{P}_p} \varphi_q$ on $\text{supp} \varphi_p$, where \mathcal{P}_p is the set of all nodes $q \neq p$ such that q is in the support of φ_p . For $p \in \mathcal{P}_h^0 \setminus \tilde{\mathcal{P}}_h^0$, we have to modify the definition. We refer to [16, 58], for the modification of the basis functions in the neighborhood of the boundary $\partial\Omega$. In terms of \mathbf{X}_h , we can introduce a new operator $\mathbf{Q}^* : [L^2(\Omega)]^2 \rightarrow \mathbf{X}_h$ by

$$\int_{\Omega} \mathbf{Q}^* \mathbf{g} \varphi_p \, dx = \int_{\Omega} \mathbf{g} \varphi_p \, dx, \quad p \in \mathcal{P}_h^0. \quad (5.1)$$

It is easy to see that \mathbf{Q}^* is locally defined. We can write $\mathbf{Q}^* \mathbf{g} = \sum_{p \in \mathcal{P}_h^0} \gamma_p \chi_p$ with

$$\gamma_p := \frac{\int_{\Omega} \mathbf{g} \varphi_p \, dx}{\int_{\Omega} \varphi_p \, dx}.$$

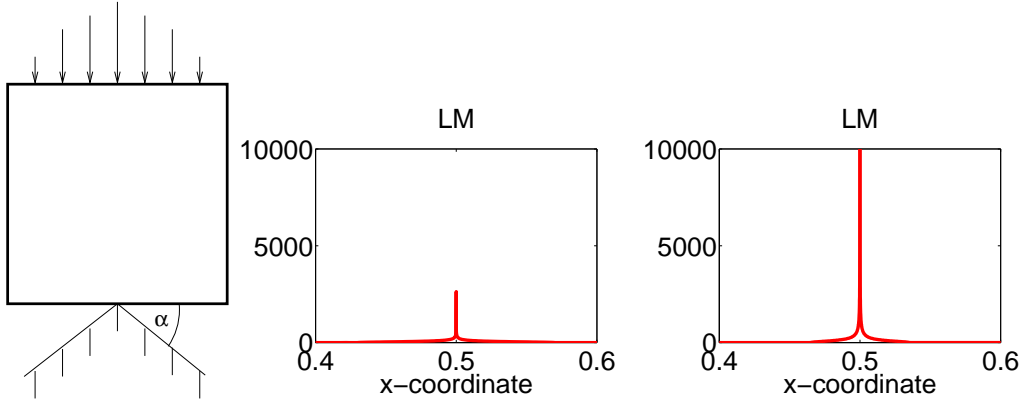


FIGURE 4.7. Square on triangle: Problem setting (left) and contact stress $\alpha = \pi/6$ (middle) and $\alpha = \pi/3$ (right)

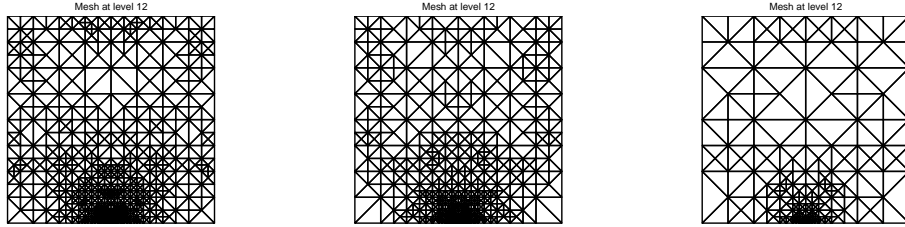


FIGURE 4.8. Square on triangle: Mesh on level 12 for $\alpha = \pi/6, \pi/4, \pi/3$.

Associated with \mathbf{Q}^* is the operator $\mathbf{Q} : [H^1(\Omega)]^2 \rightarrow \mathbf{V}_h$ which satisfies the following conditions

$$\mathbf{Q}\mathbf{v}|_{\Gamma_C} = \Pi\mathbf{v} \quad (5.2)$$

$$\int_{\Omega} \mathbf{Q}\mathbf{v}\chi_p \, dx = \int_{\Omega} \mathbf{v}\chi_p \, dx, \quad p \in \mathcal{P}_h^0 \quad (5.3)$$

$$\mathbf{Q}\mathbf{v}(p) = \mathbf{S}\mathbf{v}(p), \quad p \in \mathcal{P}_h^b, \quad (5.4)$$

where \mathbf{S} is a locally defined Scott–Zhang type operator, see, e.g., [38] preserving the Dirichlet boundary conditions on Γ_D , and \mathcal{P}_h^b stands for all nodes on $\bar{\Gamma}_D \cup \Gamma_N$. By (5.2)–(5.4), the operator \mathbf{Q} is uniquely defined. We note that \mathbf{Q} is not well defined for $[L^2(\Omega)]^2$ but can be extended to functions with a well defined trace. This operator is itself a Scott–Zhang type operator, and it can be easily shown that

$$\|\mathbf{v} - \mathbf{Q}\mathbf{v}\|_{0;T} \leq Ch_T |v|_{1;\omega_T}, \quad (5.5)$$

$$\|\mathbf{v} - \mathbf{Q}\mathbf{v}\|_{0;e} \leq Ch_e^{1/2} |v|_{1;\omega_e}, \quad (5.6)$$

where ω_T includes all elements which share at least one vertex with T and ω_e is the union of all elements having an endpoint of e as vertex. We introduce a data dependent oscillation term

$$\tilde{\xi}^2 := \sum_{T \in \mathcal{T}_h} \tilde{\xi}_T^2, \quad \tilde{\xi}_T^2 := \frac{h_T^2}{2\mu} \|\mathbf{f} - \mathbf{Q}^*\mathbf{f}\|_{0;T}^2$$

and note that $\xi_T \leq \tilde{\xi}_T$ but that $\tilde{\xi}$ is also of order h^2 if $\mathbf{f} \in [H^1(\Omega)]^2$ and that $\tilde{\xi} = 0$ if \mathbf{f} is constant on Ω .

THEOREM 5.1. *There exists a constant $C < \infty$ independent of the mesh-size such that*

$$\|\boldsymbol{\lambda} - \boldsymbol{\lambda}_h\|_{-\frac{1}{2};\Gamma_C} \leq C \left(\|\mathbf{u} - \mathbf{u}_h\|_a + \tilde{\xi} \right).$$

Proof. We start with the definition of the dual norm and use the $H^{1/2}$ -stability of the mortar projection

$$\|\boldsymbol{\lambda} - \boldsymbol{\lambda}_h\|_{-\frac{1}{2};\Gamma_C} = \sup_{\mathbf{v} \in \mathbf{W}} \frac{b(\boldsymbol{\lambda} - \boldsymbol{\lambda}_h, \mathbf{v})}{\|\mathbf{v}\|_{\frac{1}{2};\Gamma_C}} = \sup_{\mathbf{v} \in \mathbf{W}} \frac{b(\boldsymbol{\lambda}, \mathbf{v} - \Pi\mathbf{v}) + b(\boldsymbol{\lambda} - \boldsymbol{\lambda}_h, \Pi\mathbf{v})}{\|\mathbf{v}\|_{\frac{1}{2};\Gamma_C}}.$$

In the following for simplicity of notation, we denote the harmonic extension of $\mathbf{v} \in \mathbf{W}$ onto \mathbf{V}_0 by \mathbf{v} and observe that

$$b(\boldsymbol{\lambda} - \boldsymbol{\lambda}_h, \Pi\mathbf{v}) = b(\boldsymbol{\lambda} - \boldsymbol{\lambda}_h, \mathbf{Q}\mathbf{v}) = a(\mathbf{u}_h - \mathbf{u}, \mathbf{Q}\mathbf{v}) \leq C\|\mathbf{u} - \mathbf{u}_h\|_a \|\mathbf{Q}\mathbf{v}\|_1.$$

Then the H^1 -stability of \mathbf{Q} and the continuity of the harmonic extensions yield

$$\|\boldsymbol{\lambda} - \boldsymbol{\lambda}_h\|_{-\frac{1}{2};\Gamma_C} \leq \sup_{\mathbf{v} \in \mathbf{W}} \frac{b(\boldsymbol{\lambda}, \mathbf{v} - \Pi\mathbf{v})}{\|\mathbf{v}\|_{\frac{1}{2};\Gamma_C}} + C\|\mathbf{u} - \mathbf{u}_h\|_a.$$

To bound the first term on the right hand side, we use the operator \mathbf{Q}^* and the approximation property (5.5) of \mathbf{Q}

$$\begin{aligned} b(\boldsymbol{\lambda}, \mathbf{v} - \Pi\mathbf{v}) &= \mathbf{f}(\mathbf{v} - \mathbf{Q}\mathbf{v}) - a(\mathbf{u}, \mathbf{v} - \mathbf{Q}\mathbf{v}) \\ &= (\mathbf{f} - \mathbf{Q}^*\mathbf{f}, \mathbf{v} - \mathbf{Q}\mathbf{v})_0 - a(\mathbf{u} - \mathbf{u}_h, \mathbf{v} - \mathbf{Q}\mathbf{v}) - a(\mathbf{u}_h, \mathbf{v} - \mathbf{Q}\mathbf{v}) \\ &\leq C(\tilde{\xi} + \|\mathbf{u} - \mathbf{u}_h\|_a) \|\mathbf{v}\|_a - a(\mathbf{u}_h, \mathbf{v} - \mathbf{Q}\mathbf{v}) - b(\boldsymbol{\lambda}_h, \mathbf{v} - \mathbf{Q}\mathbf{v}). \end{aligned}$$

Integration by parts and (5.6) give that the last two terms can be bounded by the jump of $\boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}$ on the edges

$$b(\boldsymbol{\lambda}, \mathbf{v} - \Pi\mathbf{v}) \leq C \left(\tilde{\xi} + \|\mathbf{u} - \mathbf{u}_h\|_a + \left(\sum_{e \in \mathcal{E}_h} \frac{h_e}{2\mu} \|[\boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}]\|_{0;e}^2 \right)^{\frac{1}{2}} \right) \|\mathbf{v}\|_1,$$

where the jump on the boundary edges e has to be understood in the following way: If $e \subset \Gamma_D$, we set $[\boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}] = \mathbf{0}$, if $e \subset \Gamma_N$, we define $[\boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}] = \boldsymbol{\sigma}(\mathbf{u}_h)|_{T_e} \mathbf{n}_{T_e}$, where $e \subset \partial T_e$ and for $e \subset \Gamma_C$, we set $[\boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}] = \boldsymbol{\sigma}(\mathbf{u}_h)|_{T_e} \mathbf{n}_{T_e} + \boldsymbol{\lambda}_h|_e$. Using the $H(\text{div})$ -conformity of $\boldsymbol{\sigma}_h$, we get

$$\begin{aligned} \sum_{e \in \mathcal{E}_h} \frac{h_e}{2\mu} \|[\boldsymbol{\sigma}(\mathbf{u}_h)\mathbf{n}]\|_{0;e}^2 &\leq C \sum_{T \in \mathcal{T}_h} \sum_{e \subset \partial T} \frac{h_e}{2\mu} \|(\boldsymbol{\sigma}(\mathbf{u}_h) - \boldsymbol{\sigma}_h)\mathbf{n}_e\|_{0;e}^2 \\ &\leq C\eta^2 \leq C(\|\mathbf{u} - \mathbf{u}_h\|_a^2 + \xi^2) \leq C(\|\mathbf{u} - \mathbf{u}_h\|_a^2 + \tilde{\xi}^2). \end{aligned}$$

Here, we have used a discrete norm equivalence with appropriate scaling factors. \square

6. AFEM energy control. The error estimator η is quite attractive because it provides upper bounds which tend numerically to one, and no constant depending on the Lamé parameters enters into the upper bound for the error. However by definition, it is an element based a posteriori error estimator. Using this type of estimator in combination with a AFEM control based refinement strategy [10, 25, 43], we have to refine not only a marked element but also all elements in \mathcal{T}_T . This results from the proof of the upper bound for η_T .

Thus, it is more attractive to work with an error estimator providing a more local upper bound for its contributions. As it is well-known, the standard residual type error estimator is a good choice from this point of view. Using this idea, we define a second error estimator $\hat{\eta}$ in terms of its edge contributions

$$\hat{\eta}^2 := \sum_{e \in \mathcal{E}_h^-} \hat{\eta}_e^2, \quad \hat{\eta}_e^2 := \frac{h_e}{2\mu} \|[\boldsymbol{\sigma}(\mathbf{u}_h)]\mathbf{n}_e\|_{0;e}^2 + \frac{h_e^2}{2\mu} \|\Pi_0 \mathbf{f}\|_{0;\omega_e}^2,$$

where \mathcal{E}_h^- denotes all edges not on Γ_C . The natural definition of the jump on the interior edges is extended, as in the last section, to the boundary edges by taking into account the different boundary conditions on Γ_N and Γ_D . Here ω_e is the union of at most two elements such that $\bar{\omega}_e := \bar{T}_1 \cup \bar{T}_2$ for each interior edge $e = \partial T_1 \cap \partial T_2$ and $\omega_e = T$ for each boundary edge $e = \partial T \cap \partial \Omega$. Additionally, the data oscillation term is defined by

$$\hat{\xi}^2 := \sum_{T \in \mathcal{T}_h} \hat{\xi}_T^2, \quad \hat{\xi}_T^2 := \frac{h_T^2}{2\mu} \|\mathbf{f} - \mathbf{\Pi}_0 \mathbf{f}\|_{0;T}^2.$$

For the AFEM strategy, we consider a sequence of triangulations generated by a special refinement strategy based on the error estimator $\hat{\eta}$. Therefore, the lower index h indicating the meshsize is replaced by l standing for the actual refinement step, e.g., \mathcal{T}_h is replaced by \mathcal{T}_l . The refinement is carried out by bisection such that all elements in \mathcal{T}_l can be written as union of elements in \mathcal{T}_{l+1} .

Each marked edge, i.e., $e \in \mathcal{M}_l \subseteq \mathcal{E}_l$, is decomposed by the refinement into two subedges of the same length and $T \subset \omega_e$ is split into subtriangles such that an interior vertex is obtained, see, e.g., [43].

As it is standard for AFEM strategies, we use a bulk criterion to define the set \mathcal{M}_l of marked edges. More precisely, for $\theta \in (0, 1)$, we select edges such that

$$\sum_{e \in \mathcal{M}_l} \hat{\eta}_e^2 \geq \theta \hat{\eta}_l^2. \quad (6.1)$$

Moreover, we require that

$$\hat{\xi}_{l+1} \leq \frac{1}{2} \hat{\xi}_l. \quad (6.2)$$

If this is not fulfilled automatically with the next refinement step controlled by the marked edges, additional elements are refined to satisfy (6.2). We note that for many contact problems, $\mathbf{f} = \mathbf{0}$ or constant volume forces are considered, and thus (6.2) is automatically guaranteed.

The error estimator $\hat{\eta}$ is a standard residual type error estimator for a variational equality. Moreover, no error term due to the contact boundary Γ_C enters. Thus it is well known that the local error estimator contribution $\hat{\eta}_e$, $e \in \mathcal{M}_l$, can be bounded by

$$\hat{\eta}_e^2 \leq C \left(\|\mathbf{u}_{l+1} - \mathbf{u}_l\|_{a;\omega_e}^2 + h_e^2 \|\mathbf{f} - \mathbf{\Pi}_0 \mathbf{f}\|_{0;\omega_e}^2 \right),$$

see, e.g., [43] for the Laplace operator. Of crucial importance for the proof is that $e \in \mathcal{M}_l$ is bisected in the next refinement step and that $T \subseteq \omega_e$ is decomposed into several subtriangles having one interior vertex. Then we can work with hierarchical bubble functions having local support and follow the lines of [55].

Using the results of the previous sections, we find that $\hat{\eta}$ also provides, up to data oscillation terms, an upper bound for the discretization error. Theorem 3.5 yields $\|\mathbf{u} - \mathbf{u}_l\|_a \leq C(\eta_l + \hat{\xi}_l)$, therefore it is sufficient to show $\eta_l \leq C(\hat{\eta}_l + \hat{\xi}_l)$. The proof of the lower bound of the element contributions η_T guarantees that

$$\eta_T^2 \leq C \left(\sum_{e \in \mathcal{E}_T^f} h_e \|\mathbf{g}_e - \{\mathcal{C}\varepsilon(\mathbf{u}_h)\} \mathbf{n}_e\|_{0;e}^2 + \eta_e^2 \right) + \sum_{e \in \mathcal{E}_T^C} h_e \|\boldsymbol{\lambda}_h + \boldsymbol{\sigma}(\mathbf{u}_h) \mathbf{n}\|_{0;e}^2.$$

The first term appears in the analysis of equilibrated flux based error estimators and can be bounded by the residual, and the third term is bounded in (3.13) in terms of $\hat{\eta}$ and $\hat{\xi}$. Thus, we obtain

$$\eta_l \leq C(\hat{\eta}_l + \hat{\xi}_l), \quad (6.3)$$

and the upper bound follows.

In contrast to the conforming variational equality setting, no Galerkin orthogonality holds for our inequality, and thus $\|\mathbf{u} - \mathbf{u}_l\|_a^2 - \|\mathbf{u} - \mathbf{u}_{l+1}\|_a^2$ is not equal to $\|\mathbf{u}_{l+1} - \mathbf{u}_l\|_a^2$. To overcome this difficulty, we apply the techniques introduced in [15] for the obstacle problem. The new idea of [15] is to consider the energy and not the energy norm. Observing that for each triangulation \mathcal{T}_l , we have $\mathbf{u}_l \in K$, we can work with

$$\delta_l := J(\mathbf{u}_l) - J(\mathbf{u}) \geq 0. \quad (6.4)$$

The variational inequality is equivalent to a constrained minimization problem, i.e., $J(\mathbf{u}) \leq J(\mathbf{v})$, $\mathbf{v} \in K$, and in terms of $K_l \subset K_{l+1}$, we have

$$0 \leq \delta_{l+1} \leq \delta_l.$$

The following theorem shows that a stronger result can be obtained.

THEOREM 6.1. *There exist constants $\rho_1, \rho_2 < 1$ and $c_\xi, C_\xi < \infty$ such that*

$$\begin{aligned} \delta_{l+1} &\leq \rho_1 \delta_l + c_\xi \hat{\xi}_l^2, \\ \delta_{l+1} + C_\xi \hat{\xi}_{l+1}^2 &\leq \rho_2 (\delta_l + C_\xi \hat{\xi}_l^2). \end{aligned}$$

Proof. The proof follows the lines of [15] and is straightforward. For convenience of the reader, we outline the basic steps. We observe that $-b(\mathbf{u}, \boldsymbol{\lambda}_{l+1})$ does not have to be greater equal zero, but that we have $-b(\mathbf{u}_l, \boldsymbol{\lambda}_{l+1}) \geq 0$. Then, the complementarity condition on level $l+1$, the bulk criterion (6.1), Corollary 3.7 and (6.3) yield

$$\begin{aligned} \delta_l - \delta_{l+1} &= J(\mathbf{u}_l) - J(\mathbf{u}_{l+1}) = \frac{1}{2} \|\mathbf{u}_l - \mathbf{u}_{l+1}\|_a^2 - b(\mathbf{u}_l, \boldsymbol{\lambda}_{l+1}) \\ &\geq \frac{1}{2} \|\mathbf{u}_l - \mathbf{u}_{l+1}\|_a^2 \geq C \sum_{e \in \mathcal{M}_l} \|\mathbf{u}_l - \mathbf{u}_{l+1}\|_{a; \omega_e}^2 \\ &\geq \sum_{e \in \mathcal{M}_l} (C \hat{\eta}_e^2 - ch_e^2 \|\mathbf{f} - \boldsymbol{\Pi}_0 \mathbf{f}\|_{0; \omega_e}^2) \\ &\geq (C \hat{\eta}^2 - c \hat{\xi}_l^2) \geq (C \delta_l - c \hat{\xi}_l^2), \end{aligned}$$

and thus $\delta_{l+1} \leq (1 - C) \delta_l + c \hat{\xi}_l^2$. Moreover, the bulk criteria for the data oscillation term gives $\hat{\xi}_{l+1}^2 \leq \frac{1}{2} \hat{\xi}_l^2$ and thus $\delta_{l+1} + 3c_\xi \hat{\xi}_{l+1}^2 \leq \rho_1 \delta_l + c_\xi \hat{\xi}_l^2 + 3c_\xi \hat{\xi}_{l+1}^2 \leq \rho_1 \delta_l + \frac{5}{2} c_\xi \hat{\xi}_l^2 \leq \rho_2 (\delta_l + 3c_\xi \hat{\xi}_l^2)$. \square

REMARK 6.2. *We observe that $\hat{\xi}_l = 0$ for a constant \mathbf{f} . In that case, the energy term δ_l is a strictly decreasing function with respect to the refinement level l . Moreover, we do not have to create inner nodes in the elements.*

7. Numerical Results for AFEM strategy. In this section, we use the AFEM strategy introduced in Section 6 on Examples 2 and 3 of Section 4. We use a repeated newest vertex bisection to ensure that an inner point is created for adjacent elements of marked edges. For details about the mesh-refinement process, we refer to [43]. As factor in the bulk criterion (6.1), we choose $\theta = 0.3$. Additionally, we compare the influence of different refinement strategies on the estimated error and the energy decay and the two error estimators $\eta, \hat{\eta}$ with an approximated error obtained by an extrapolation technique.

7.1. Square on a circle. We use the same problem setting as depicted in Figure 4.4 and the same material parameters.

In the left picture of Figure 7.1, the energy reduction is plotted. To compute δ_l , the exact energy $J(\mathbf{u})$ is approximated using an extrapolation technique. We see that the energy decay is of order $\mathcal{O}(h^2)$. The factor ρ_1 in Theorem 6.1 can be estimated by δ_{l+1}/δ_l , see the right picture in Figure 7.1. Here, we obtain a mean value of 0.56; moreover, ρ_1 is bounded by 0.94. We note that we do not consider volume forces in this example, hence $\hat{\xi} = 0$, and we neglect additional terms arising from the non-homogeneous Neumann boundary conditions.

7.2. Square on a triangle. We use the same material parameters and problem setting as given in Figure 4.7. The energy reduction using the AFEM strategy is depicted in Figure 7.2.

In Figure 7.3, the estimated reduction factor ρ_1 is depicted. We get a mean value of 0.72 and maximum of 0.93 for $\alpha = \pi/6$, mean value of 0.73 and maximum of 0.95 for $\alpha = \pi/4$ and a mean value of 0.77 and maximum of 0.96 for $\alpha = \pi/3$.

7.3. Comparison of the refinement strategies. Now we compare the effect of different refinement strategies on the estimated errors and the energy decay. To do so, we chose Example 2 and Example 3 with $\alpha = \pi/3$.

Depending on the error estimator, the mesh is refined with respect to edges or elements, see Figure 7.4. We use the residual-based error estimator $\hat{\eta}_e$ which results in an edge-based refinement and the error estimators η_T and $(\eta_T^2 + \eta_e^2)^{1/2}$ which result in an element-based refinement. For the third error estimator, the corresponding part of η_C is added to boundary elements which is motivated by Theorem 3.4. We note that if Assumption 3.1 is not fulfilled for an edge, the corresponding element is marked for refinement. Additionally for each refinement strategy, we use a mesh refinement which leads to an inner point after refinement, see Figure 7.4 (b).

In Figures 7.5 and 7.6 the results for Example 2 are given. Here, we see only small differences comparing the different results. We observe that the refinement strategies producing inner nodes perform slightly worse than the others. This can be explained by the more locally refined meshes obtained by the refinement strategies without inner-node-property. Comparing the estimators η_T and $(\eta_T^2 + \eta_e^2)^{1/2}$, we see different behavior in the beginning which can be explained by the fact that η is not able to estimate the error correctly in this range. Comparing the error estimated by η and $\hat{\eta}$, we see that η is smaller than the residual estimator $\hat{\eta}$. Asymptotically however, all error estimators and refinement strategies perform equally well.

The results for Example 3 are depicted in Figure 7.7 and 7.8. Again, we see only small differences between the different strategies.

7.4. Comparison of the error estimators. As we have seen, the influence of the type of refinement on the quantitative and qualitative error and energy decay can be neglected. However, one observes differences between the error estimators. Therefore, we compare the different error estimators with a higher order error approximation. This approximation is obtained by considering $\|\mathbf{u} - \mathbf{u}_l\|_a^2 = (\|\mathbf{u}\|_a^2 - \|\mathbf{u}_l\|_a^2) + 2b(\mathbf{u}_l, \boldsymbol{\lambda})$, where the first term is approximated using extrapolation techniques and the second term by $b(\mathbf{u}_l, \boldsymbol{\lambda}_{l_{\max}})$. As error estimators, we consider $\hat{\eta}$, η and the sum $\eta + \eta_C$ which corresponds to the upper bound in Theorem 3.4.

In Figure 7.9, the results for Example 2 are given. Here, we only consider meshes that fulfill Assumption 3.1. We see that $\hat{\eta}$ yields an upper bound, but the error is overestimated with a factor of approximatively 5. For the estimator η , we see that for small meshes the error is even underestimated. $\eta + \eta_C$ however gives a good upper bound for the error with a factor of approximatively two. Similar results hold for Example 3, see Figure 7.10. We remark, that due to the singularity, the term η_C has here a greater influence, see also Figure 4.10. In all our numerical results η and $\eta + \eta_C^{\text{cont act}}$ give the best bound.

REFERENCES

- [1] M. AINSWORTH, *Robust a posteriori error estimation for non-conforming finite element approximation*, SIAM J. Numer. Anal., 42 (2005), pp. 2320–234.
- [2] M. AINSWORTH AND J. ODEN, *A posteriori error estimation in finite element analysis*, Chichester: Wiley, 2000.
- [3] M. AINSWORTH, J. ODEN, AND C. LEE, *Local a posteriori error estimators for variational inequalities*, Numer. Methods Partial Differ. Equations, (1993).
- [4] D. ARNOLD AND R. WINTHER, *Mixed finite element methods for elasticity*, Numerische Mathematik, 92 (2002), pp. 401–419.
- [5] I. BABUSKA AND M. VOGELIUS, *Feedback and adaptive finite element solution of one-dimensional boundary value problems*, Numer. Math., 44 (1984), pp. 75–102.
- [6] I. BABUSKA AND T. STROUBOULIS, *The finite element methods and its reliability*, Oxford: Clarendon Press, 2001.
- [7] F. BEN BELGACEM, *Numerical simulation of some variational inequalities arisen from unilateral contact problems by the finite element methods*, SIAM J. Numer. Anal., 37 (2000), pp. 1198–1216.
- [8] F. BEN BELGACEM, P. HILD, AND P. LABORDE, *Extension of the mortar finite element method to a variational inequality modeling unilateral contact*, Mathematical Models & Methods in Applied Sciences, 9 (1999), pp. 287–303.
- [9] F. BEN BELGACEM AND Y. RENARD, *Hybrid finite element methods for the Signorini problem*, Mathematics of Computation, 72 (2003), pp. 1117–1145.
- [10] P. BINEV, W. DAHMEN, AND R. DEVORE, *Adaptive finite element methods with convergence rates*, Numer. Math, 97 (2004), pp. 219–268.
- [11] H. BLUM AND F. SUTTMEIER, *An adaptive finite element discretisation for a simplified Signorini problem*, Calcolo, 37 (2000), pp. 65–77.
- [12] V. BOSTAN AND W. HAN, *A posteriori error analysis for finite element solutions of a frictional contact problem*, Comput. Methods Appl. Mech. Engrg., 195 (2006), pp. 1252–1274.
- [13] V. BOSTAN, W. HAN, AND B. REDDY, *A posteriori error estimation and adaptive solution of elliptic variational inequalities of the second kind*, Appl. Numer. Math., 52 (2005), pp. 13–38.
- [14] D. BRAESS, *A posteriori error estimators for obstacle problems – another look*, Numer. Mathematik, 101 (2005), pp. 523–549.
- [15] D. BRAESS, C. CARSTENSEN, AND R. HOPPE, *Convergence analysis of a conforming adaptive finite element method for an obstacle problem*. submitted.
- [16] D. BRAESS AND W. DAHMEN, *The mortar element method revisited. what are the right norms?*, in Domain decomposition methods in science and engineering. Papers of the thirteenth international conference on domain decomposition methods, D. et al., ed., 2002, pp. 27–40.
- [17] U. BRINK AND E. STEIN, *A posteriori error estimation in large-strain elasticity using equilibrated local neumann problems*, Comput. Methods Appl. Mech. Eng., 161 (1998), pp. 77–101.
- [18] G. BUSCAGLIA, R. DURAN, E. FANCELLO, R. FEIJOO, AND C. PADRA, *An adaptive finite element approach for frictionless contact problems*, Int. J. Numer. Meth. Engrg., 50 (2001), pp. 394–418.
- [19] C. CARSTENSEN AND S. BARTELS, *Each averaging technique yields reliable a posteriori error control in fem on unstructured grids. I: Low order conforming, nonconforming, and mixed fem*, Math. Comput., (2002).
- [20] C. CARSTENSEN, S. BARTELS, AND S. JANSCHKE, *A posteriori error estimates for nonconforming finite element methods*, Numerische Mathematik, 92 (2002), pp. 233–256.
- [21] C. CARSTENSEN, P. CAUSIN, AND R. SACCO, *A posteriori dual-mixed adaptive finite element error control for Lamé and Stokes equations*, Numer. Math., 101 (2005), pp. 309–332.
- [22] C. CARSTENSEN, O. SCHERF, AND P. WRIGGERS, *Adaptive finite elements for elastic bodies in contact*, SIAM J. Sci. Comput., 20 (1999), pp. 1605–1626.
- [23] P. COOREVITS, P. HILD, K. LHALOUANI, AND T. SASSI, *Mixed finite element methods for unilateral problems: convergence analysis and numerical studies*, Mathematics of Computation, 71 (2001), pp. 1–25.
- [24] E. DARI, R. DURAN, C. PADRA, AND V. VAMPA, *A posteriori error estimates for nonconforming finite element methods*, Math. Modelling Numer. Anal., 30 (1996), pp. 385–400.
- [25] W. DÖRFLER, *A convergent adaptive algorithm for poisson’s equation*, SIAM J. Numer. Anal., 33 (1996), pp. 1106–1124.
- [26] B. ERDMANN, M. FREI, R. HOPPE, R. KORNUBER, AND U. WIEST, *Adaptive finite element methods for variational inequalities*, East-West J. Numer. Math., 1 (1993), pp. 165–197.
- [27] W. HAN, *A posteriori error analysis via duality theory. With applications in modeling and numerical approximations*, Springer, New York, 2005.
- [28] J. HASLINGER, I. HLAVÁČEK, AND J. NEČAS, *Numerical methods for unilateral problems in solid mechanics*, in Handbook of Numerical Analysis, P. Ciarlet and J.-L. Lions, eds., vol. IV, North-Holland, 1996, pp. 313–485.
- [29] P. HILD, *Numerical implementation of two nonconforming finite element methods for unilateral contact*, Computer Methods in Applied Mechanics and Engineering, 184 (2000), pp. 99–123.
- [30] P. HILD AND P. LABORDE, *Quadratic finite element methods for unilateral contact problems*, Applied Numerical Mathematics, 41 (2002), pp. 410–421.
- [31] P. HILD AND S. NICAISE, *A posteriori error estimations of residual type for Signorini’s problem*, Numer. Mathematik, 101 (2005), pp. 523–549.

- [32] R. HOPPE AND R. KORNUBER, *Adaptive multilevel methods for obstacle problems*, SIAM J. Numer. Anal., 31 (1994).
- [33] S. HÜEBER AND B. WOHLMUTH, *A primal-dual active set strategy for non-linear multibody contact problems*, Computer Methods in Applied Mechanics and Engineering, 194 (2005), pp. 3147–3166.
- [34] C. JOHNSON, *Adaptive finite element methods for the obstacle problem*, Math. Models Methods Appl. Sci., 2 (1992), pp. 483–487.
- [35] D. KELLY, *The self-equilibration of residuals and complementary a posteriori error estimates in the finite element method*, Int. J. Numer. Methods Eng., 20 (1984), pp. 1491–1506.
- [36] D. KELLY AND J. ISLES, *Procedures for residual equilibration and local error estimation in the finite element method*, Commun. Appl. Numer. Methods, 5 (1989), pp. 497–505.
- [37] N. KIKUCHI AND J. ODEN, *Contact problems in elasticity: A study of variational inequalities and finite element methods*, vol. 8, SIAM Studies in Applied Mathematics, Philadelphia, 1988.
- [38] L. SCOTT AND S. ZHANG, *Finite element interpolation of nonsmooth functions satisfying boundary conditions*, Mathematics of Computation, 54 (1990), pp. 483–493.
- [39] P. LADEVÈZE AND D. LEGUILLON, *Error estimate procedure in the finite element method and applications*, SIAM J. Numer. Anal., 20 (1983), pp. 485–509.
- [40] P. LADEVÈZE AND E. MAUNDER, *A general method for recovering equilibrating element tractions*, Comput. Methods Appl. Mech. Engrg., 137 (1996), pp. 111–151.
- [41] C. LEE AND J. ODEN, *A posteriori error estimation of h-p finite element approximations of frictional contact problems.*, Comput. Methods Appl. Mech. Eng., 113 (1994), pp. 11–45.
- [42] P. MORIN, R. NOCHETTO, AND K. SIEBERT, *Data oscillation and convergence of adaptive FEM*, SIAM J. Numer. Anal., 38 (2000), pp. 466–488.
- [43] ———, *Convergence of adaptive finite element methods*, SIAM Rev., 44 (2002), pp. 631–658.
- [44] S. NICAISE, K. WITOWSKI, AND B. WOHLMUTH, *An a posteriori error estimator for the Lamé equation based on $H(\text{div})$ -conforming stress approximations*, IANS preprint 2006/005, tech. rep., University of Stuttgart, 2006.
- [45] R. NOCHETTO AND K. MEKCHAY, *Convergence of adaptive FEM for general elliptic PDE*. submitted.
- [46] R. NOCHETTO, A. SCHMIDT, K. SIEBERT, AND A. VEESER, *Pointwise a posteriori error estimates for monotone semi-linear equations*, Numer. Math., 104 (2006), pp. 515–538.
- [47] S. OHNIMUS, E. STEIN, AND E. WALHORN, *Local error estimates of FEM for displacements and stresses in linear elasticity by solving local Neumann problems*, Int. J. Numer. Meth. Engng., 52 (2001), pp. 727–746.
- [48] E. STEIN AND S. OHNIMUS, *Equilibrium method for postprocessing and error estimation in the finite element method*, Comput. Assist. Mech. Eng. Sci., 4 (1997), pp. 645–666.
- [49] ———, *Anisotropic discretization- and model-error estimation in solid mechanics by local Neumann problems*, Comput. Methods Appl Mech. Engrg., 176 (1999), pp. 363–385.
- [50] E. STEIN, S. OHNIMUS, AND E. WALHORN, *Adaptive finite element discretization in elasticity and elastoplasticity by global and local error estimators using local Neumann-problems*, Zeitschrift f. Angewandte Mathematik und Mechanik, 79 (1999), pp. 147–150.
- [51] R. STEVENSON, *An optimal adaptive finite element method*, SIAM J. Numer. Anal., 42 (2005), pp. 2188–2217.
- [52] ———, *Optimality of a standard adaptive finite element method*, Found. Comput. Math., 7 (2007), pp. 245–269.
- [53] A. VEESER, *On a posteriori error estimation for constant obstacle problems*, in Numerical methods for viscosity solutions and applications, Falcone, ed., vol. 59 of World Scientific. Ser. Adv. Math. Appl. Sci., Singapore, 2001, pp. 221–234.
- [54] R. VERFÜRTH, *A posteriori error estimation and adaptive mesh-refinement techniques*, J. Comp. Appl. Math., 50 (1994), pp. 67–83.
- [55] ———, *A review of a posteriori error estimation and adaptive mesh-refinement techniques*, Wiley–Teubner Series Advances in Numerical Mathematics, Wiley–Teubner, Chichester, Stuttgart, 1996.
- [56] ———, *A review of a posteriori error estimation techniques for elasticity problems*, Comput. Methods Appl. Mech. Engrg., 176 (1999), pp. 419–440.
- [57] Y. WANG, *Preconditioning for the mixed formulation of linear plane elasticity*, PhD thesis, Texas A & M University, 2004.
- [58] B. WOHLMUTH, *Discretization Methods and Iterative Solvers Based on Domain Decomposition*, Springer, Berlin, 2001.
- [59] ———, *A comparison of dual Lagrange multiplier spaces for mortar finite element discretizations*, M²AN, 36 (2002), pp. 995–1012.
- [60] ———, *An a posteriori error estimator for two-body contact problems on non-matching meshes*, to appear in J. of Scientific Computing, (2007).
- [61] P. WRIGGERS AND O. SCHERF, *Different a posteriori error estimators and indicators for contact problems*, Math. Comput. Modelling, 28 (1998), pp. 437–447.

Alexander Weiss
Pfaffenwaldring 57
70569 Stuttgart
Germany
E-Mail: weiss@ians.uni-stuttgart.de

Barbara I. Wohlmuth
Pfaffenwaldring 57
70569 Stuttgart
Germany
E-Mail: wohlmuth@ians.uni-stuttgart.de

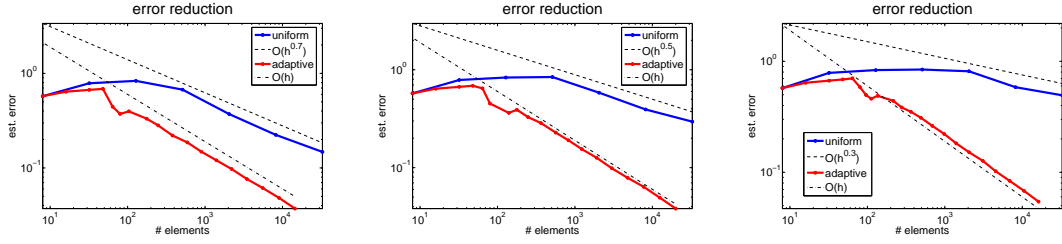


FIGURE 4.9. Square on triangle: Estimated error (adaptive/uniform) for $\alpha = \pi/6, \pi/4, \pi/3$.

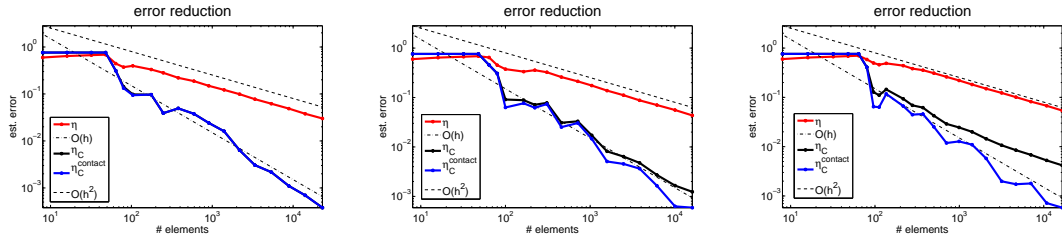


FIGURE 4.10. Square on triangle: Comparison of η, η_C and $\eta_C^{contact}$ for $\alpha = \pi/6, \pi/4, \pi/3$.

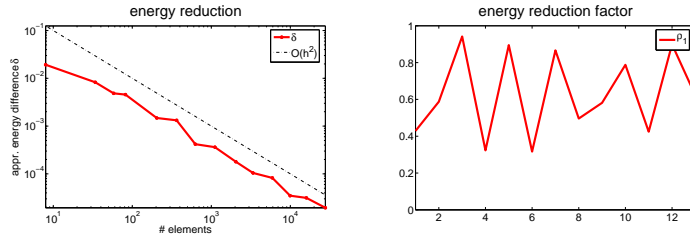


FIGURE 7.1. Square on circle (AFEM): Energy reduction and estimated factor ρ_1 .

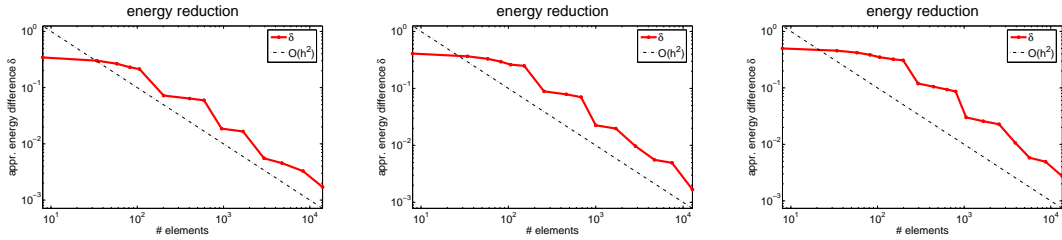


FIGURE 7.2. Square on triangle (AFEM): Energy reduction for $\alpha = \pi/6, \pi/4, \pi/3$.

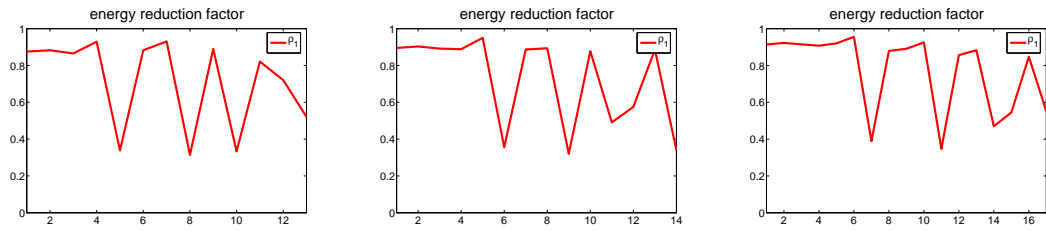


FIGURE 7.3. Square on triangle (AFEM): Estimated reduction factor ρ_1 for $\alpha = \pi/6, \pi/4, \pi/3$.




FIGURE 7.4. Refinement strategies for edge- and element-based estimators (a) without and (b) with inner-node-property

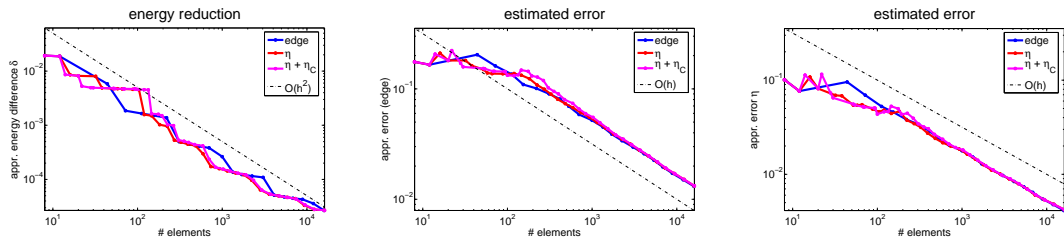


FIGURE 7.5. Square on circle: Comparison of different errors estimators, refinement strategy (a). Left: energy decay, middle: $\hat{\eta}$, right: η

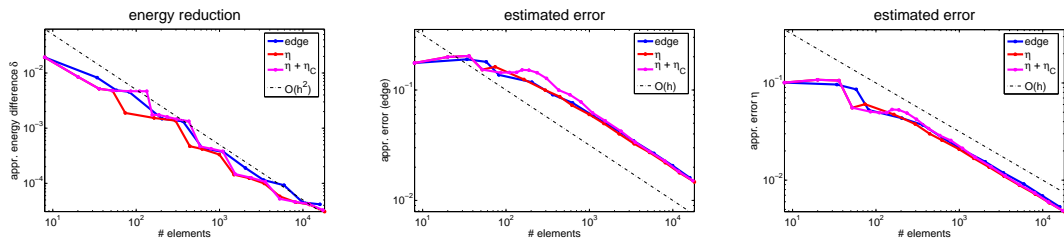


FIGURE 7.6. Square on circle: Comparison of different errors estimators, refinement strategy (b). Left: energy decay, middle: $\hat{\eta}$, right: η

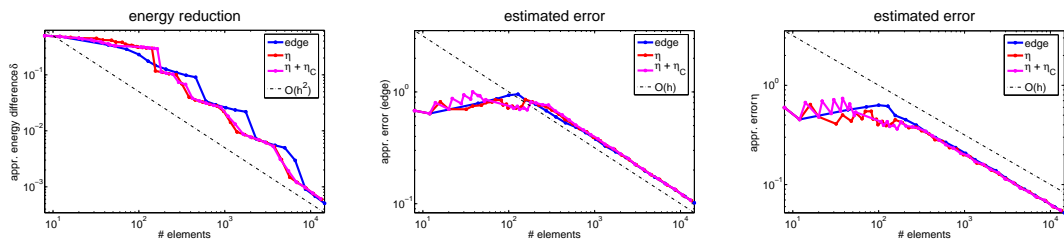


FIGURE 7.7. Square on triangle: Comparison of different errors estimators, refinement strategy (a). Left: energy decay, middle: $\hat{\eta}$, right: η

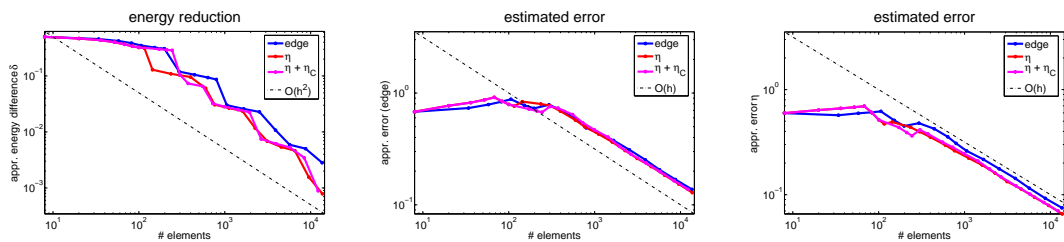


FIGURE 7.8. Square on triangle: Comparison of different errors estimators, refinement strategy (b). Left: energy decay, middle: $\hat{\eta}$, right: η

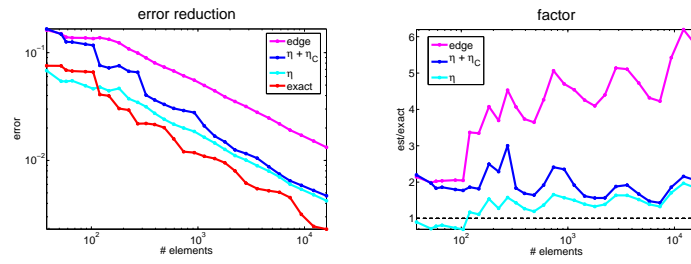


FIGURE 7.9. *Square on circle: Comparison of error estimators*

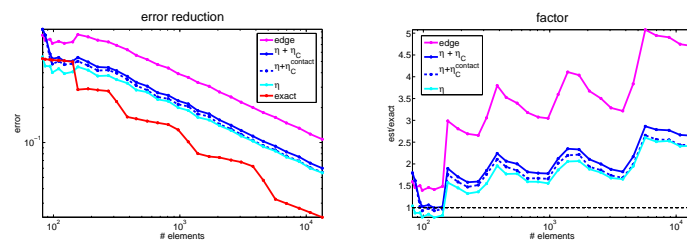


FIGURE 7.10. *Square on triangle ($\alpha = \pi/3$): Comparison of error estimators*

Erschienenene Preprints ab Nummer 2007/001

Komplette Liste: <http://preprints.ians.uni-stuttgart.de>

- 2007/001 *Lehrstuhl Rohde, Lehrstuhl Wohlmuth, AG Sändig*: Jahresbericht IANS 2006
- 2007/002 *Dechevski, L.T., Wendland, W.L.*: On the Bramble-Hilbert Lemma, II
- 2007/003 *Hager, C., Wohlmuth, B.I.*: Analysis of a modified mass lumping method for the stabilization of frictional contact problems
- 2007/004 *Sändig, A.-M.*: Variational methods for nonlinear boundary value problems in elasticity. Lectures at the Charles University Prague, Feb.07
- 2007/005 *Dressel, A., Rohde, C.*: Global existence and uniqueness of solutions for a viscoelastic two-phase model with nonlocal capillarity
- 2007/006 *Dressel, A., Rohde, C.*: Time-asymptotic behaviour of weak solutions for a viscoelastic two-phase model with nonlocal capillarity
- 2007/007 *Kohr, M., Wendland, W.L.*: Boundary integral equations for a three-dimensional Brinkman flow problem
- 2007/008 *Sändig, A.-M.*: Vorlesung Mathematik für Informatiker und Softwaretechniker I, WS 2006/2007
- 2007/009 *Surulescu, Ch.*: On a Time-Dependent Fluid-Solid Coupling in 3D with Nonstandard Boundary Conditions
- 2007/010 *Melnyk, T.*: Homogenization of a Boundary-Value Problem with a Nonlinear Boundary Condition in a Thick Junction of Type 3:2:1
- 2007/011 *Haink, J., Rohde, C.*: Local Discontinuous-Galerkin Schemes for Model Problems in Phase Transition Theory
- 2007/011 *Weiss, A., Wohlmuth, B.I.*: A posteriori error estimator and error control for contact problems